


1/16 4
1/8" 3
3/16" 2
1/4" 1
* REMOVE ONE ADDITIONAL GASKET
WHEN USING A LEGEND PLATE

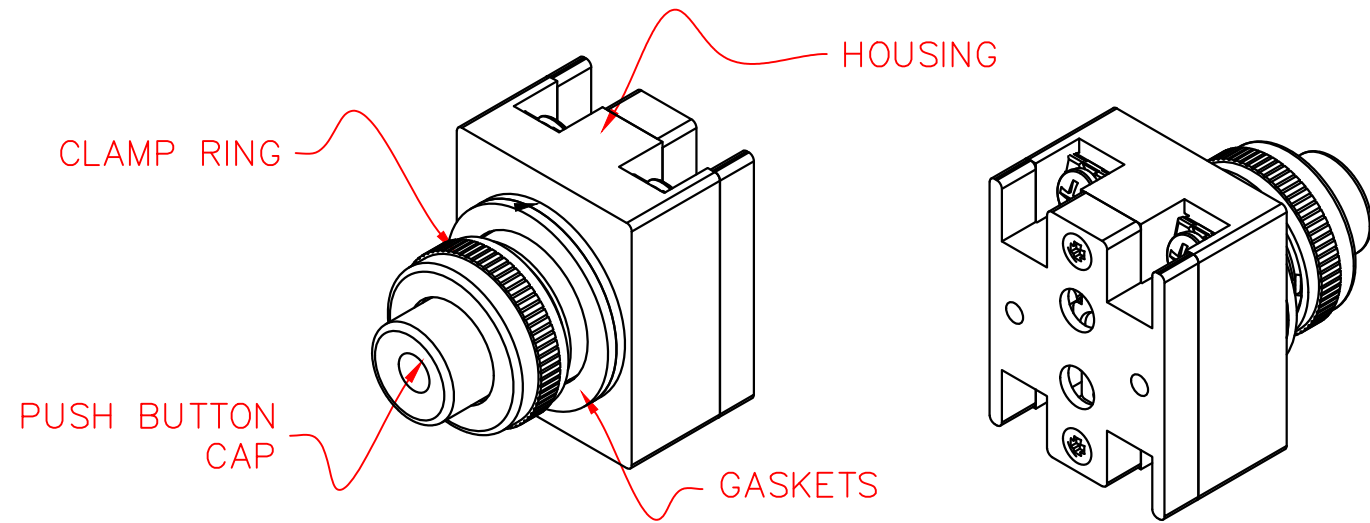

NOTES:

- 1) MOUNTING HOLE IN PANEL - $\phi 7/8$ (22MM)
- 2) MOUNTING HOLE SPACING (FOR STANDARD LEGEND PLATES) - HORIZONTAL & VERTICAL DISTANCE - 1.750 CENTER TO CENTER
- 3) CHOICE OF ALUMINUM OR PLASTIC CLAMP RING (NEMA 4 OR NEMA 4X). CLAMP RINGS FIT CONTROL CONCEPTS 22MM PRODUCT LINE

XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
REV	DESCRIPTION	DATE	BY

TOLERANCE: .XX +/- 0.02 .XXX +/- 0.005 .XXXX +/- 0.001 ANGLES +/- 0.5 DEG UNLESS OTHERWISE SPECIFIED		 since 1976 P.O. BOX 496 BEAVER, PA 15009 www.c3controls.com
This drawing is the property of c3controls. The drawing may not be copied, used or disclosed, for any purpose except as authorized in writing by c3controls.		
Description: 22MM PRODUCT LINE EXTENDED PUSH BUTTON OPERATOR ASSEMBLY DRAWING		Date: 03-07-2001 Scale: 1:1
Drawn By: JRT/RCG		Drawing Number: WC100002