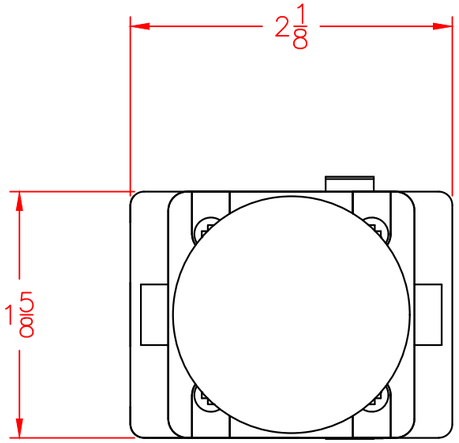

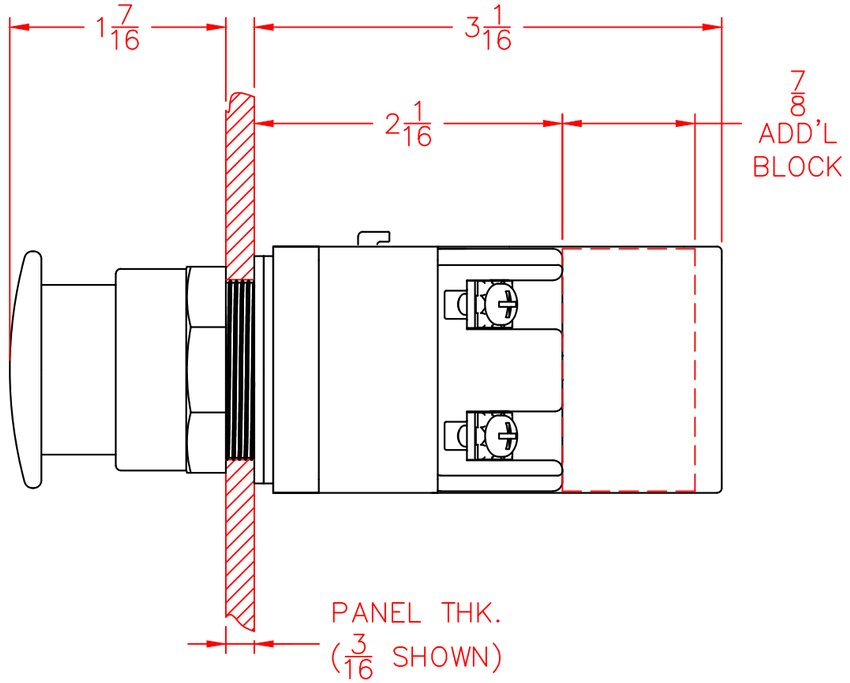



3/16" 2
1/4" 1
* REMOVE ONE ADDITIONAL GASKET WHEN USING A LEGEND PLATE

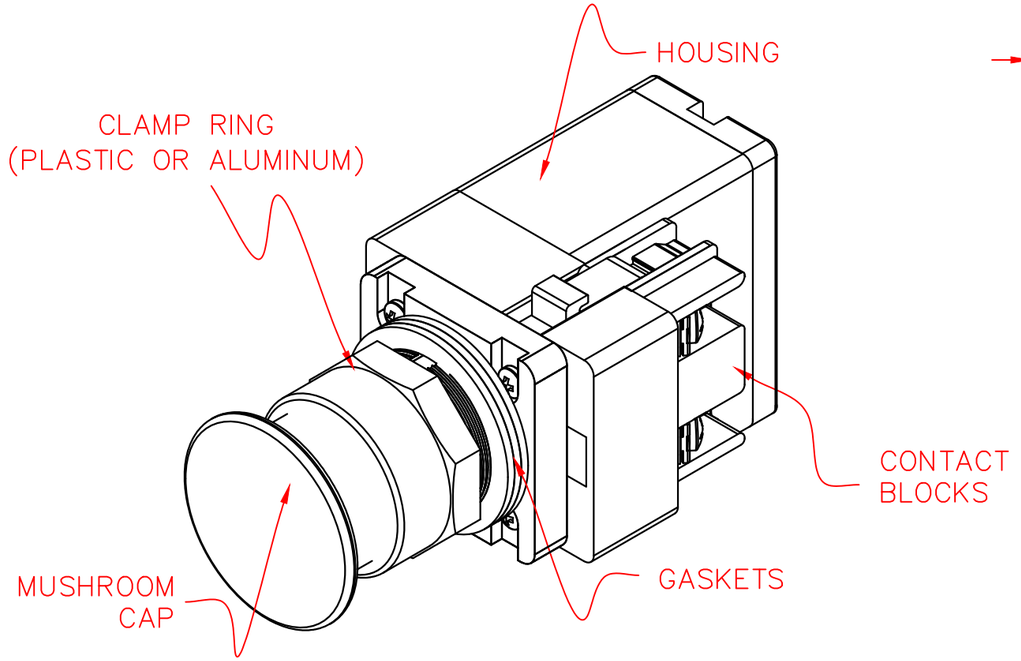

NOTES:

1) MOUNTING HOLE IN PANEL – ø1–3/16 (30MM)

3) MOUNTING HOLE SPACING (FOR STANDARD LEGEND PLATES) – HORIZONTIAL & VERTICAL DISTANCE – 2.250 CENTER TO CENTER

2) CHOICE OF ALUMINUM OR PLASTIC CLAMP RING (NEMA 4 OR NEMA 4X).

REV	DESCRIPTION	DATE	BY
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX
XXX	XXXXXXXXXX	XXXX	XXX

30MM PRODUCT LINE
2 & 3 POS ILLUMINATED RESISTOR PUSH–PULL MAINTAINED OPERATOR DATA SHEET

DRAWN BY: RCG

DATE: 06–06–02

SCALE: 1:1

DRAWING NO. WC100065

CONTROL CONCEPTS CORP.
P.O. BOX 496
664 STATE STREET
BEAVER, PA 15009