

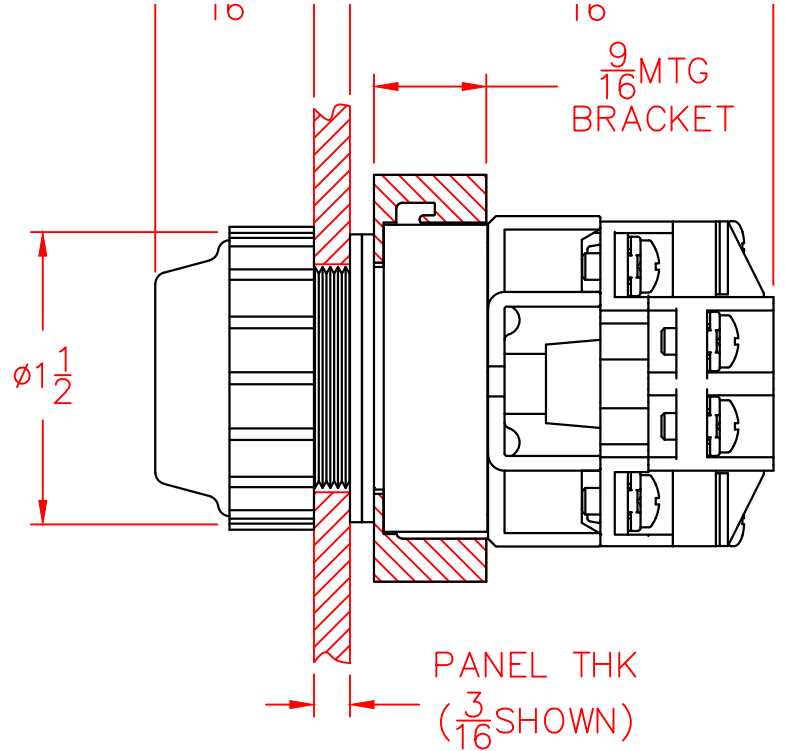


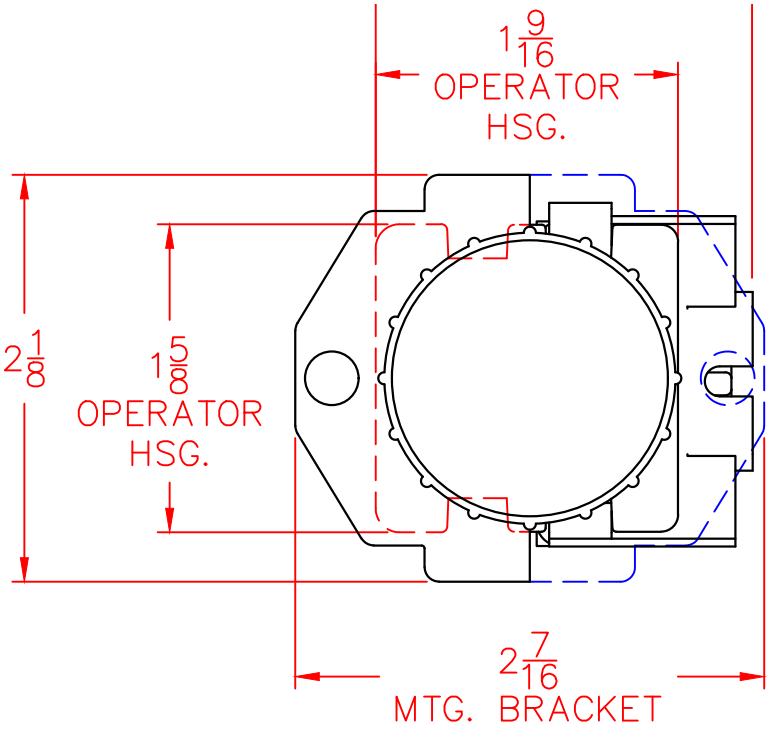

1/8
3/16"
1/4"
3
2
1
* REMOVE ONE ADDITIONAL GASKET
WHEN USING A LEGEND PLATE

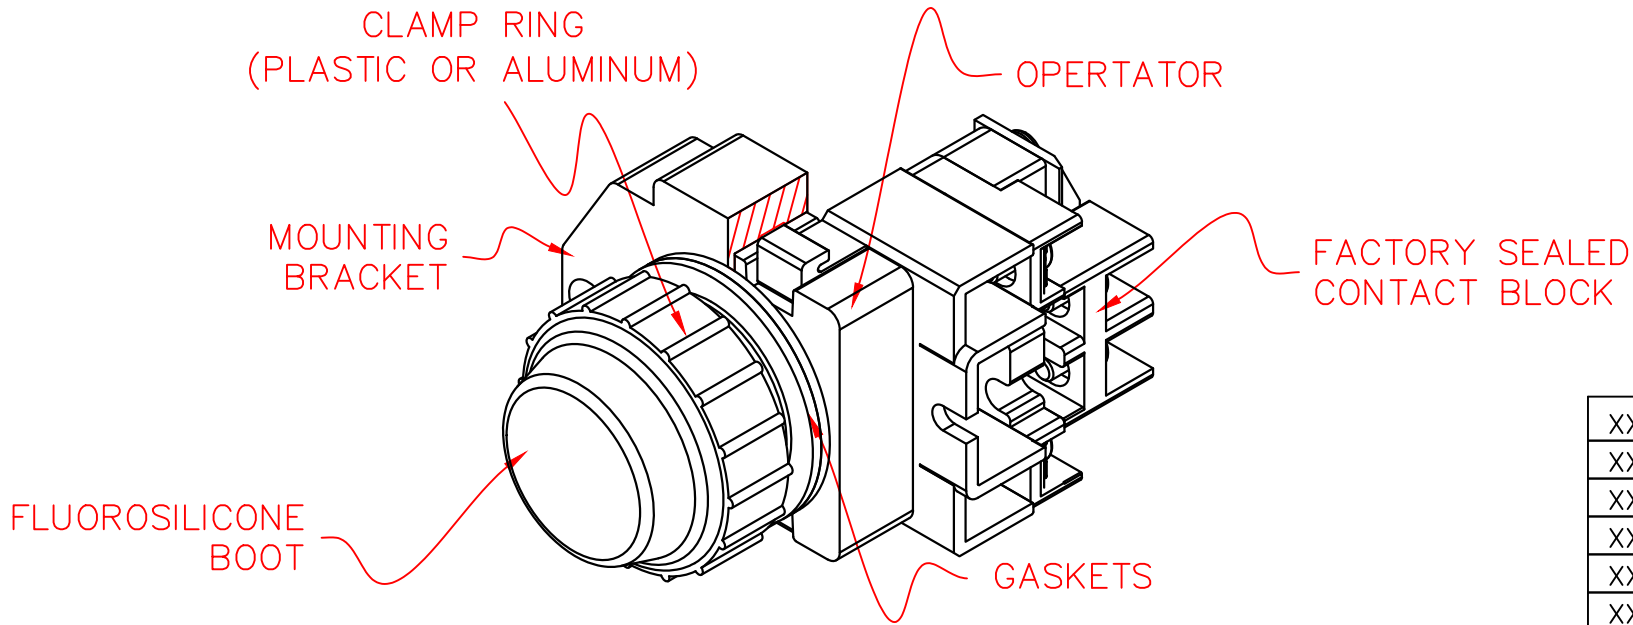

NOTES:

- 1) MOUNTING HOLE IN PANEL - $\phi 1-3/16$ (30MM)
- 3) MOUNTING HOLE SPACING (FOR STANDARD LEGEND PLATES) - HORIZONTAL & VERTICAL DISTANCE - 2.250 CENTER TO CENTER
- 2) CHOICE OF ALUMINUM OR PLASTIC CLAMP RING (NEMA 4 OR NEMA 4X).

XXX	XXXXXXXXXXXX	XXXX	XXX	30MM PRODUCT LINE FLUOROSILICONE BOOT OPERATOR W/ FACTORY SEALED CONTACT BLOCK DATA SHEET	
XXX	XXXXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXXXX	XXXX	XXX		
REV	DESCRIPTION	DATE	BY	DRAWN BY: RCG	DATE: 08-09-01