



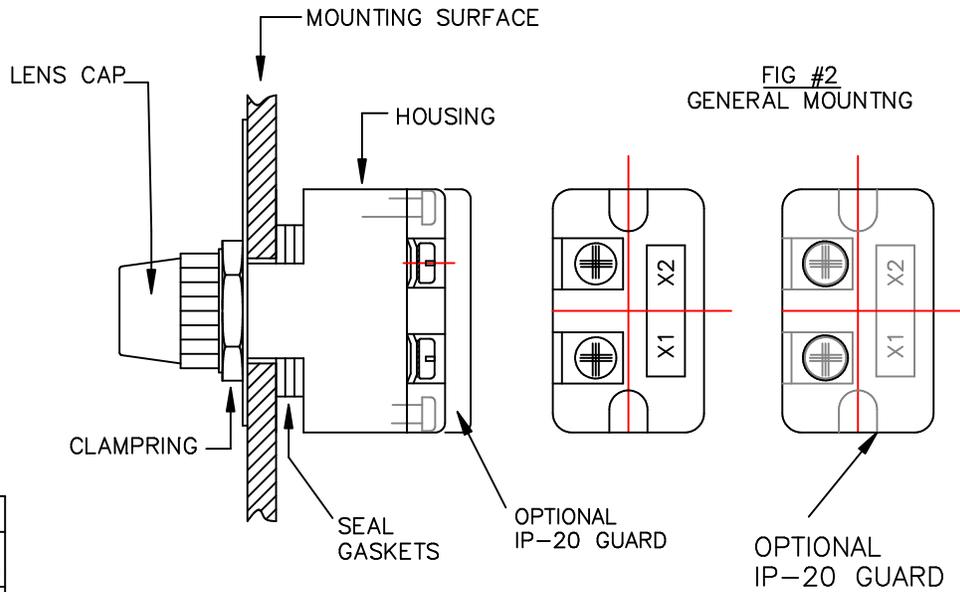

MOUNTING INFORMATION

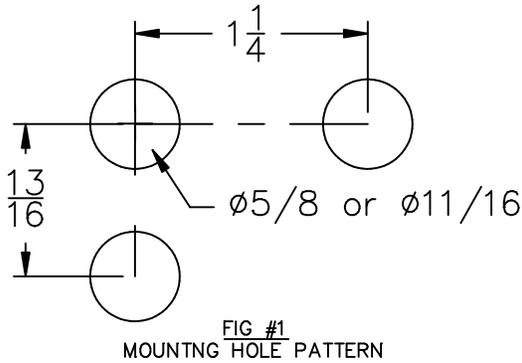

Panel Thickness (in)	# of Gaskets 3/16" (4.8mm)	# of Gaskets 1/16" (1.6mm)
less than 0.06	1	2
0.06 – 0.120	1	1
0.120 – 0.180	1	0
0.180 – 0.240	0	2
0.240 – 0.300	0	1

* REMOVE ONE 1/16" (1.6MM) GASKET WHEN USING A LEGEND PLATE

* FULLY ASSEMBLED OPERATORS COME STANDARD WITH ONE 3/16"(4.8MM) AND TWO 1/16"(1.6MM) GASKETS

WIRE RANGES:

#12-20 AWG (SOLID OR STANDARD COPPER)

TORQUE:

7-12 LB-IN RECOMMENDED
 20 LB-IN MAX

INSTALLATION INSTRUCTIONS

- 1) AFTER REMOVING THE LIGHT FROM ITS PACKAGE, UNSCREW AND REMOVE THE CLAMPRING
- 2) TO ASSURE A GOOD SEAL, THE CORRECT NUMBER OF GASKETS MUST BE USED – REFER TO TABLE 1.
- 3) INSERT LIGHT HOUSING FROM THE REAR OF PANEL, THROUGH THE PANEL MOUNTING HOLE – REFER TO FIGURE 2.
- 4) SECURE THE LIGHT BY INSTALLING THE CLAMPRING. SUFFICIENT TORQUE WILL COMPRESS THE SEAL GASKETS MAKING THE OPERATOR TIGHT TO THE PANEL.
- 5) OPTIONAL IP-20 COVER (FINGER PROTECTION) CAN BE SNAPPED ONTO THE REAR OF THE UNIT. ALIGN THE SNAPS OVER THE RECESS IN THE COVER, ROUND HOLES ALIGN WITH HEADS OF TERMINAL SCREWS. PUSH IN UNTIL A "SNAP" IS HEARD INDICATING THAT THE GUARD IS SECURE.

ENVIRONMENTAL:

- 1) SUITABLE FOR USE ON FLAT SURFACES OF TYPE 1, 3, 3R, 4, 4X, 12, & 13 ENCLOSURES