


$\frac{3}{16}$ "
 $\frac{1}{4}$ "
 $\frac{1}{8}$
 ADD'L BLOCK
 *REMOVE ONE ADD'L GASKET WHEN USING A LEGEND PLATE
 $\frac{2}{1}$

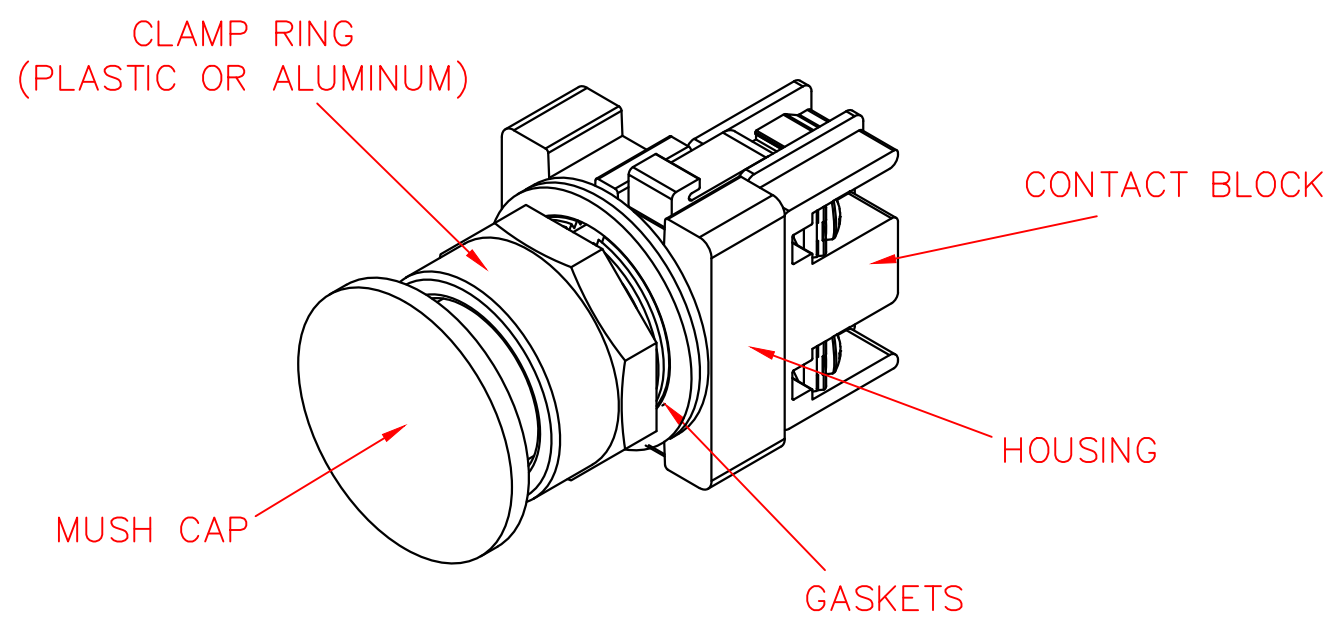

NOTES:

- 1) MOUNTING HOLE IN PANEL – $\phi 1-3/16$ (30MM)
- 3) MOUNTING HOLE SPACING (FOR STANDARD LEGEN PLATES) – HORIZONTAL & VERTICAL DISTANCE – 2.250 CENTER TO CENTER
- 2) CHOICE OF ALUMINUM OR PLASTIC CLAMP RING (NEMA 4 OR NEMA 4X).

XXX	XXXXXXXXXX	XXXX	XXX	30MM PRODUCT LINE STD. MUSH CAP PUSH BUTTON OPERATOR W/ CONTACT BLOCK DATA SHEET	
XXX	XXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXX	XXXX	XXX		
XXX	XXXXXXXXXX	XXXX	XXX		
REV	DESCRIPTION	DATE	BY	DRAWN BY: RCG	DATE: 08-08-01