

ENCLOSED POWER SUPPLIES



c3controls' Series EPS (Enclosed Power Supplies) provides reliable 24VAC power to HVAC controllers in VAV (variable air volume) systems. These assemblies offer a convenient construction consisting of one to two transformers varying in size to provide one to five 24VAC 100VA Class 2 outputs housed within a single metal enclosure. Additionally, these enclosed power supplies provide on/off control, power indication, equipment overcurrent protection, as well as options for voltage separation compartments and convenience receptacle outlets. These versatile products are UL 916 listed ensuring safety and easy acceptance in your application.



Section 33

Enclosed Power Supplies	4
Specifications	5
Circuit Diagrams	6
Dimensions	7

PROVEN



Conformity to Standards:
UL 916

Certifications:
UL File #: E530348

Visit c3controls.com to download product certifications.

NOTE: The scope (range, description, price, specifications, dimensions, etc.) of the product featured in this section is subject to change without notice. Refer to c3controls.com for product updates.

REVISION 07.2026

ENCLOSED POWER SUPPLIES

c3controls offers a comprehensive line of Enclosed Power Supplies that are designed to provide consistent power to various types of applications. c3controls' Enclosed Power Supplies are a reliable and cost-effective solution for your power supply needs. Check out all the innovative features these Enclosed Power Supplies have to offer.

MANUFACTURED TO DELIVER THE MOST RELIABLE AND QUALITY POWER

✓ Proven	Our Series EPS Enclosed Power Supplies are UL Listed to meet global standards requirements and are compliant with RoHS directives.	 
✓ Secure Installation	Quick and simple installation as the product is prepackaged and the main breaker/switch has access outside the enclosure.	
✓ Multi-Winding Transformers	The transformer has multiple windings that divides the output power to individual outputs, each with 100VA of an available power provided by a 4 ampere circuit breaker and LED indicator.	
✓ Environmentally Secure	Entire assembly comes enclosed in a metal enclosure designed and tested for ensuring operation in extreme temperatures, to keep your application running.	
✓ Visible Certifications	Our product certifications and electrical ratings are clearly marked on the outside of the enclosure for easy reference during installation.	
✓ 36-Month Warranty*	Every product is backed by our 36-Month Warranty—giving you confidence in the quality, reliability, and performance of components designed for the most demanding applications.	
✓ Guaranteed Same-Day Shipping*	Product availability reduces inventory, and improves cash-flow—saving you money. With c3controls any order for standard catalog items received by 6:00pm ET is guaranteed to ship same-day.	
✓ Advantage Pricing	Our approach to product development, manufacturing, and focus on servicing the OEM and Electrical Equipment Builder reduces cost. The result—the best value in the industry.	

*See c3controls Terms & Conditions

EPS-S500AC5-120-24-B



EPS-S300AC3-120-24-F



EPS-S100AC1-120-24-F



EPS-S100AC1-120-24-B



UNIQUE PRODUCT LINE FEATURES

AVAILABILITY OF ACCESSORIES



Each rated enclosed power supply has an option to an accessory outlet available for convenient access to the power receptacle.

INNOVATIVE DESIGN/CONTROLLED AND SECURE OUTPUTS



The transformer steps down the input voltage to 24VAC at the output. Each 24VAC output has its own circuit breaker and ON/OFF switch to control specific outputs.

COMPACT



Ultra-compact design to save valuable space.

ENCLOSURE FEATURES



The enclosure of S300 and S500 have optional separation between high and low voltage. The two separate compartments have different removable covers to access high and low voltage compartments and each being fastened by its own hardware.

FIND IT FAST

Enclosed Power Supplies



c3controls.com

- Certifications
- Specifications
- Dimension Drawings
- Installation Instructions
- Easy to Buy

ENCLOSED POWER SUPPLIES SELECTION GUIDE




CATALOG NUMBER	METALLIC NEMA 1 ENCLOSURE	TRANSFORMER	120VAC PRIMARY / 24VAC SECONDARY VOLTAGE	10A ILLUMINATED CIRCUIT BREAKER	120VAC CONVENIENCE RECEPTACLE	PRIMARY TO SECONDARY CIRCUIT SEPARATION	EXTERNAL TERMINAL STRIP	LIST
EPS-S100AC1-120-24-B	✓	Single 100VA, AC, 1 ungrounded Class 2 output circuits	✓		2 Receptacles		✓	\$ 184.78
EPS-S100AC1-120-24-F	✓	Single 100VA, AC, 1 ungrounded Class 2 output circuits	✓	✓	2 Receptacles		✓	\$ 193.76
EPS-D100AC1-120-24-B	✓	Dual 100VA, AC, 2 ungrounded Class 2 output circuits	✓		2 Receptacles		✓	\$ 310.54
EPS-D100AC1-120-24-F	✓	Dual 100VA, AC, 2 ungrounded Class 2 output circuits	✓	✓	2 Receptacles		✓	\$ 328.86
EPS-S300AC3-120-24-B	✓	Single 300VA, AC, 3 ungrounded Class 2 output circuits	✓					\$ 596.00
EPS-S300AC3-120-24-F	✓	Single 300VA, AC, 3 ungrounded Class 2 output circuits	✓	✓	1 Receptacle	✓		\$ 970.26
EPS-S500AC5-120-24-B	✓	Single 500VA, AC, 5 ungrounded Class 2 output circuits	✓					\$ 812.41
EPS-S500AC5-120-24-F	✓	Single 500VA, AC, 5 ungrounded Class 2 output circuits	✓	✓	1 Receptacle	✓		\$1152.08


SPECIFICATIONS:

ENCLOSED POWER SUPPLIES					
		\$500	\$300	\$100	D100
	UNITS				
TRANSFORMER					
Transformer Size	VA	500	300	100	100
Number of Transformers		1	1	1	2
INPUT CIRCUIT (PRIMARY)					
Input Voltage		120VAC 60 Hz			
Input Terminals					
Wire Range/Size	AWG	24 - 12			
Terminal Torque	in-lbs	4.5			
Convenience Receptacle					
-F Assemblies		NEMA 5-15R 125VAC 15A, 1 Receptacle		NEMA 5-15R 125VAC 15A, 2 Receptacles	
-B Assemblies		—		NEMA 5-15R 125VAC 15A, 2 Receptacles	
Overcurrent Protection					
-F Assemblies		10A UL 1077 Circuit Breaker			
-B Assemblies		No provided input circuit overcurrent protection			
OUTPUT CIRCUIT(S)					
Number of Output Circuits		5	3	1	2
Output Rating (Each)		100VA Ungrounded Class 2 (UL Listed)			
Output Voltage		24VAC 60 Hz			
Output Terminals					
Wire Range/Size	AWG	24 - 12		26 - 14	
Terminal Torque	in-lbs	4.4		7	
ENVIRONMENTAL RATING					
NEMA Type 1					
ENCLOSURE MATERIAL					
Carbon Steel					
ENCLOSURE DIMENSIONS					
See dimension drawings					
UL STANDARDS					
UL 916 Listed, UL File #: E530348					
Designed for UL 916 with Class 2 Output Circuits					
ROHS COMPLIANCE					
For RoHS compliance documentation by product, refer to c3controls.com					


EPS-S500AC5-120-24 & EPS-S300AC3-120-24 ASSEMBLIES

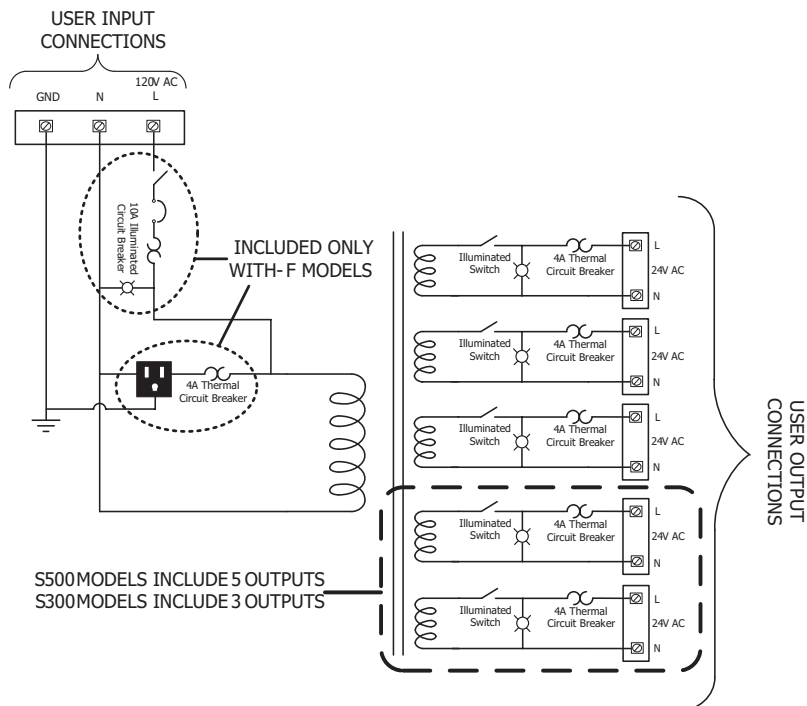


EPS100AC1-120-24 & EPS-D100AC1-120-24 ASSEMBLIES

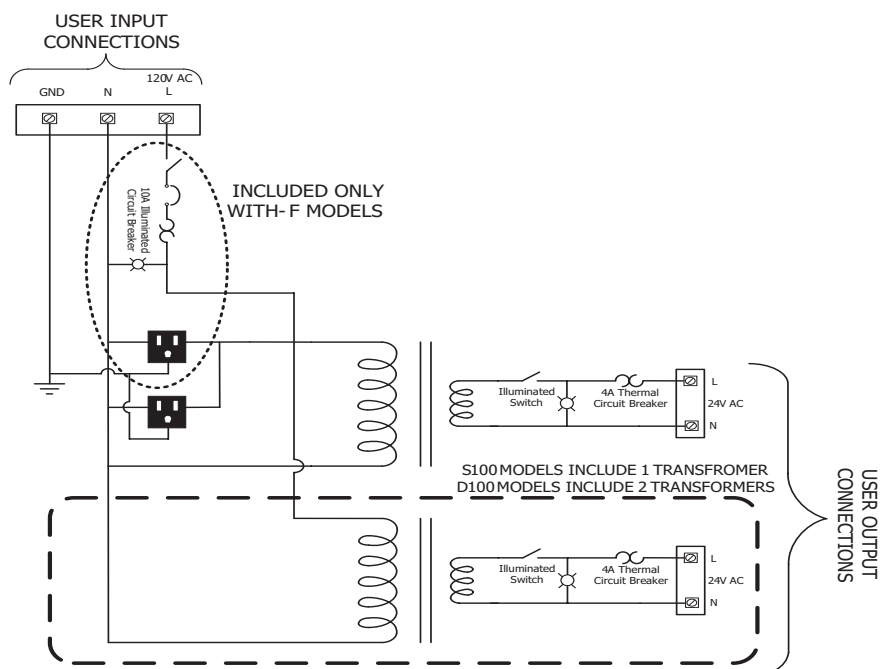


EPS-S500AC5-120-24 & EPS-S300AC3-120-24 ASSEMBLIES

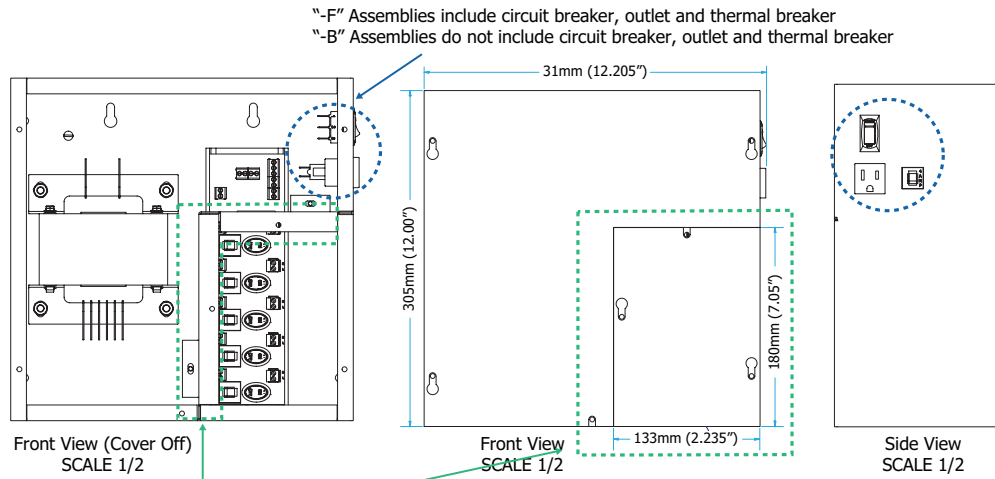

"-F" Assemblies include primary to secondary circuit separation plate and a two piece cover
 "-B" Assemblies do not include primary to secondary circuit separation plate and use a one piece cover

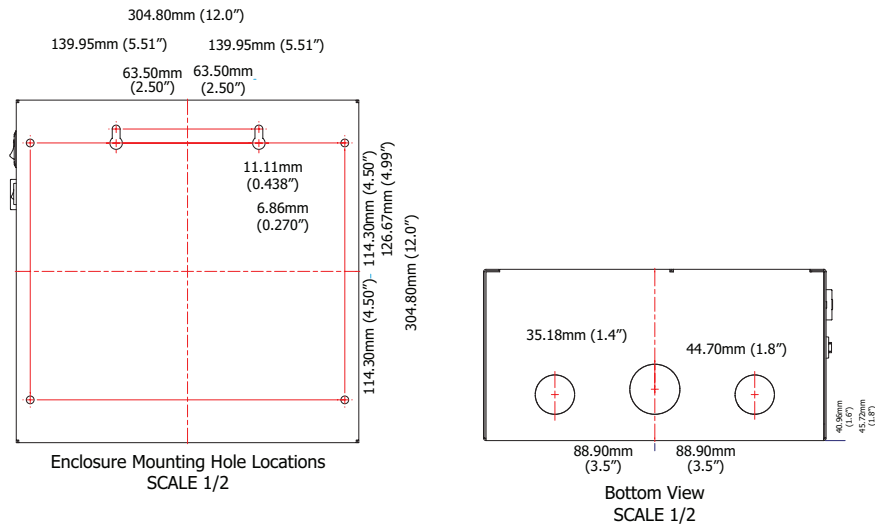

EPS-S100AC1-120-24 ASSEMBLIES

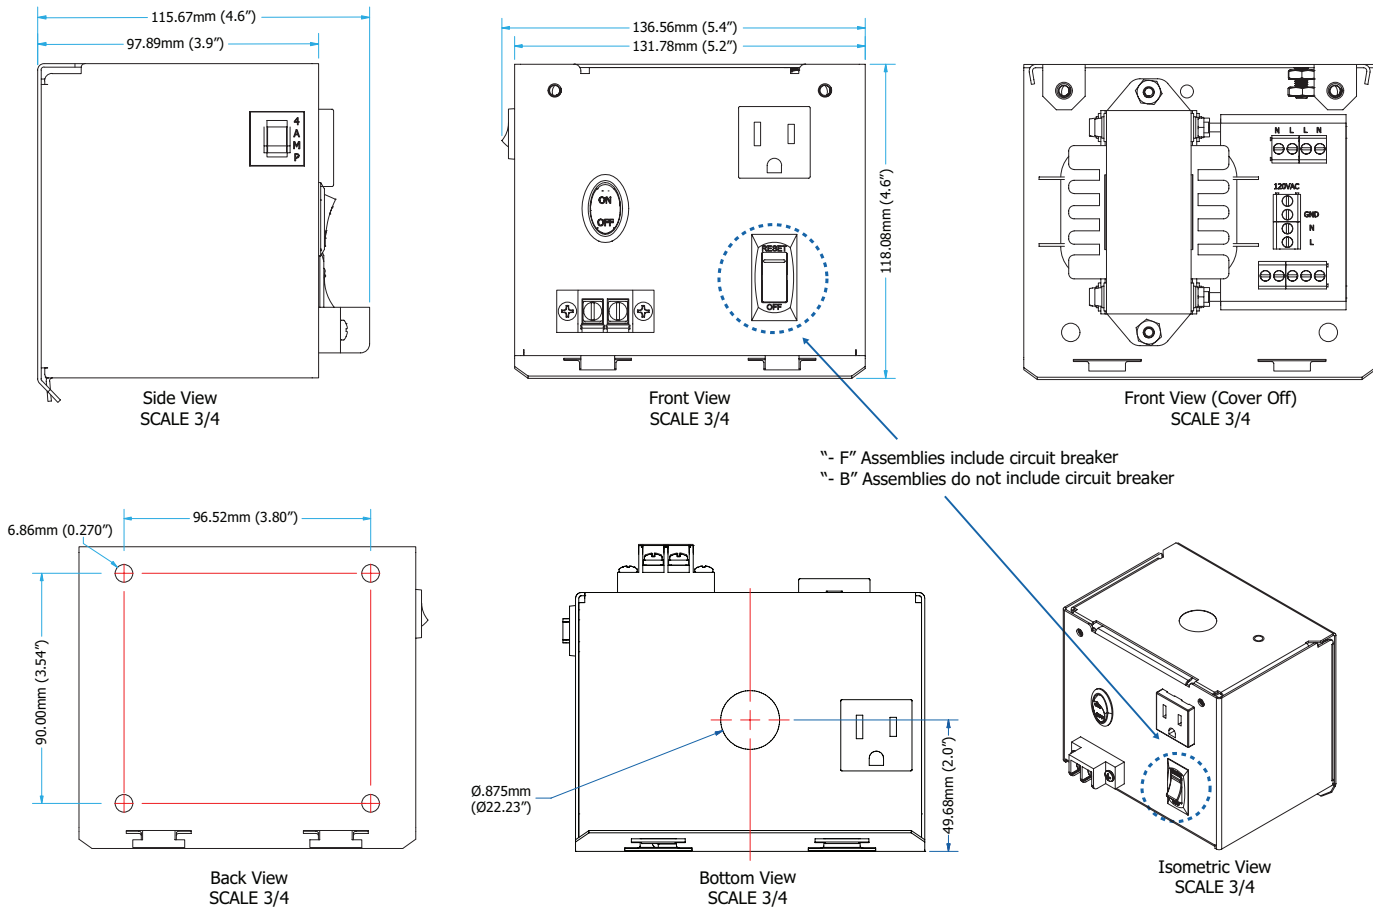

EPS-D100AC1-120-24 ASSEMBLIES

