

DC MINIATURE CIRCUIT BREAKERS

series
1110

c3controls' line of Series 1110 Direct Current (DC) Miniature Circuit Breakers (MCBs) provide reliable short circuit and overload protection for all your DC industrial control, transportation, energy storage system and photovoltaic applications. Our DC MCBs offer a wide range of pole sizes, amperage ranges, and trip curves providing superior performance and flexible application environments.



Section 32

UL 489B Branch Circuit Breakers	4
Accessories	6
Specifications	7
Trip Characteristics	8
Circuit Diagrams	9
Dimensions	10

PROVEN



Conformity to Standards:
DC Miniature Circuit Breakers
UL 489B
CSA C22.2 No. 305

Accessories:
UL 489

Certifications:

UL File#: E533935
UL File#: E533935

UL File#: E508090

Visit c3controls.com to download product certifications.

NOTE: The scope (range, description, price, specifications, dimensions, etc.) of the product featured in this section is subject to change without notice. Refer to c3controls.com for product updates.

DC MINIATURE CIRCUIT BREAKERS

c3controls knows the importance of clean energy in ensuring a more sustainable future. That's why we're proud to offer Direct Current Miniature Circuit Breakers to support and protect the transition to renewable energy and mission critical applications.

DELIVERING SUPERIOR PRODUCT QUALITY AND MANUFACTURING EXCELLENCE

✓ Proven	Our Series 1110 DC Miniature Circuit Breakers are UL Listed per UL489B, the standard for DC photovoltaic systems and are compliant to the RoHS directives. 
✓ Compact	Only 17.5mm wide per pole for reduced panel area and lower installed costs.
✓ Wide Range of Operation	Rated 250V DC per pole for up to 1000V DC with current ratings from 0.5A to 63A.
✓ Easy to Install	35mm DIN rail mounting for fast and easy installation and removal.
✓ Visible Markings	High visibility labels and markings can be seen from the front and side of the device for easy identification.
✓ Added Safety	Line and load side IP20 guarded finger-safe terminals prevent accidental contact with live parts, while allowing ring, fork, and bare wire connections.
✓ Customizable Options	With up to 10 shorting link / jumper configurations, there is a plethora of options to suit all applications.
✓ 36-Month Warranty*	Every product is backed by our 36-Month Warranty—giving you confidence in the quality, reliability, and performance of components designed for the most demanding applications.
✓ Guaranteed Same-Day Shipping*	Product availability reduces inventory, and improves cash-flow—saving you money. With c3controls any order for standard catalog items received by 6:00pm ET is guaranteed to ship same-day.
✓ Advantage Pricing	Our approach to product development, manufacturing, and focus on servicing the OEM and Electrical Equipment Builder reduces cost. The result—the best value in the industry.

*See c3controls Terms & Conditions

Single Pole



Two Pole



Four Pole



UNIQUE PRODUCT LINE FEATURES

FULL-RANGE CIRCUIT PROTECTION



Available in one, two, and four pole constructions, C or D trip curves, and include both magnetic and thermal elements for overload and short circuit protection.

SHORT CIRCUIT CURRENT RATING




10kA short circuit current rating on all constructions — the highest interruption rating in the market.

TRIP-FREE DESIGN



Holding the operating handle in the ON position will not prevent the miniature circuit breaker from tripping.

WIRING MADE EASY

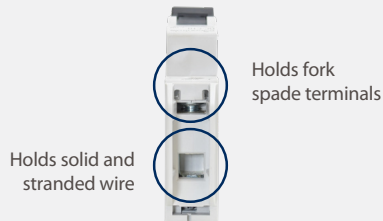


Holds fork spade terminals

Holds solid and stranded wire

Captive screws make it impossible to lose screws when wiring and our box lug design terminals will accept a wide range of copper wire sizes.

POLARIZED DESIGN

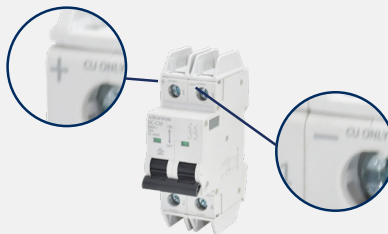

Provides an extra grade of unidirectional protection for overloads and short circuits. Correct wiring is required to achieve circuit protection performance.

SAFETY



All c3controls miniature circuit breakers have built-in IP20 finger-safe protection from accidental contact. Also, breaker status is clearly indicated via the color-coded status window.

FIND IT FAST

DC Miniature Circuit Breakers



- Certifications
- Specifications
- Dimension Drawings
- Installation Instructions
- Easy to Buy

c3controls.com

IT'S EASY TO BUILD YOUR OWN CIRCUIT BREAKER

Simply pick the code number from each of the sections below and combine them to build your part number.

**DC Miniature Circuit Breakers
UL 489B Branch Circuit Breakers**

1110 – **CB** **2** – **VII**
I II III IV V VI VII

Example: To build one of our most popular DC Miniature Circuit Breakers, the part number would be **1110 + CB + III + IV + 2 + VI + VII** or **1110-CB1C2D10-SB**

**I. PRODUCT TYPE**

CODE	DESCRIPTION
1110	Series 1110 DC Miniature Circuit Breaker

II. DEVICE TYPE

CODE	DESCRIPTION
CB	UL 489B Circuit Breaker / Branch Protection

III. NUMBER OF POLES

CODE	DESCRIPTION	LIST
1	Single Pole	\$118.50
2	Two Pole	\$237.00
4	Four Pole	\$474.00

IV. TRIP CHARACTERISTICS

CODE	DESCRIPTION
C	Trip Curve C
D	Trip Curve D

V. FRAME SIZE

CODE	DESCRIPTION
2	17.5mm Frame per Pole

DISCOUNT
SCHEDULE

F

VI. OPERATING CURRENT

CODE	DESCRIPTION
C50	0.5A*
D10	1.0A*
D16	1.6A*
D20	2.0A*
D30	3.0A
D40	4.0A*
D50	5.0A
D60	6.0A*
D70	7.0A*
D80	8.0A*
U10	10A
U13	13A*
U15	15A
U16	16A*
U20	20A
U25	25A*
U30	30A
U32	32A*
U40	40A*
U50	50A
U60	60A*
U63	63A

VII. SHORTING LINK / JUMPER CONFIGURATIONS

CODE	DESCRIPTION	
FOR 1 POLE		
(Blank)	No Shorting Link (Jumper)	\$ 0.00
FOR 2 POLE		
(Blank)	No Shorting Link (Jumper)	\$ 0.00
Note: Same-day shipping applies only to C Curve.		
SB	Shorting Link (Jumper) at Bottom	\$ 23.70
ST	Shorting Link (Jumper) at Top*	\$ 23.70
FOR 4 POLE		
(Blank)	No Shorting Link (Jumper)*	\$ 0.00
STLT	Shorting Link (Jumper) connected at Top keeping Load in Between*	\$ 47.40
SBB	Shorting Link (Jumper) connected Both at Bottom*	\$ 47.40
SBLB	Shorting Link (Jumper) connected at Bottom keeping Load in Between*	\$ 47.40
SBTB	Shorting Link (Jumper) connected at Bottom then Top then Bottom	\$ 47.40
STBT	Shorting Link (Jumper) connected at Top then Bottom then Top*	\$ 47.40

Products marked with * are not available for same-day shipping. Contact our Customer First team for lead times and minimum order quantities.

UL 489B BRANCH CIRCUIT BREAKERS

c3controls Series 1110 Direct Current Miniature Circuit Breakers were designed and manufactured for all your DC industrial control, transportation, energy storage system, and photovoltaic applications. With both thermal and magnetic trip elements for overload and short circuit protection, these breakers provide high voltage DC circuit protection and fully meet UL 489B, the standard for DC photovoltaic systems. They are available in one, two, three, and four pole configurations with current ratings from 0.5A to 63A.

Product features include:

- Line/load reversible construction makes field wiring error-proof.
- Combination head terminal screws allow the use of “straight”, “phillips”, or “posidrive” screwdrivers for fast and reliable wiring.
- Compact 17.5mm width per pole construction reduces panel size and mounts onto 35mm DIN rail.
- Dual style terminals accept stranded wire 0.82mm² – 26.7mm² (#18 - #3 AWG) and busbar stabs, and are IP20 guarded against accidental contact with live parts.
- Trip-free design provides assurance that holding the operating handle in the ON position will not prevent the miniature circuit breaker from tripping.
- Up to 22 unique current rating configurations from 0.5 to 63A for a broad range of applications.
- Dual trip curve offering (Trip Curves C & D) provides individual load protection pertaining to direct current for situations like renewable energy generation using solar arrays, energy transfer with micro-grids using battery packs, emergency storage and use with Uninterruptible Power Supplies (UPS).



SOME OF OUR POPULAR CONFIGURATIONS:

DC MINIATURE CIRCUIT BREAKERS		
CATALOG NUMBER	DESCRIPTION	LIST
1110-CB1C2D10-SB	DC Miniature Circuit Breaker, UL 489B, 1 Pole, Trip Curve C, 1.0A, Jumper at Bottom	\$ 142.20
1110-CB1C2U10	DC Miniature Circuit Breaker, UL 489B, 1 Pole, Trip Curve C, 10A	\$ 118.50
1110-CB2C2U30	DC Miniature Circuit Breaker, UL 489B, 2 Pole, Trip Curve C, 30A	\$ 237.00
1110-CB2D2U16-SB	DC Miniature Circuit Breaker, UL 489B, 2 Pole, Trip Curve D, 16A, Jumper at Bottom	\$ 260.70
1110-CB4D2U60-SBTB	DC Miniature Circuit Breaker, UL 489B, 4 Pole, Trip Curve D, 60A, Jumper Connected at Bottom then Top then Bottom	\$ 521.40

SIDE MOUNTED AUXILIARY CONTACT



Our side mounted auxiliary contacts allow remote indication of the status of a circuit breaker or supplementary protector to which it is attached. These contacts come with IP20 guarded terminals and snap onto the left side of the circuit breaker or supplementary protector without the use of tools.

Ratings: AC12 - 6A @ 240V AC (50/60Hz)
DC12 - 1A @ 130V DC
2A @ 48V DC
6A @ 24V DC

CODE	DESCRIPTION	LIST
1100-SA211	1 Normally Open and 1 Normally Closed	\$ 52.60

HEAVY DUTY LOCK-OFF ATTACHMENT



This lock-off attachment when used with a padlock ensures that no unauthorized person switches the circuit breaker or supplementary protector to the ON state after a trip.



CODE	DESCRIPTION	LIST
1100-L01	Lock-Off Attachment	\$ 9.80

SIDE MOUNTED SHUNT-TRIP MODULES



Shunt-trip modules enable the circuit breaker or supplementary protector to trip, thereby cutting off the power supply to any machine or equipment remotely. These modules snap onto the right side of the circuit breaker or supplementary protector without the use of tools. IP20 guarded terminals protect against accidental contact with live parts and can be used in conjunction with auxiliary contacts.

CODE	DESCRIPTION	LIST
1100-SRXD	110V AC, 50/60Hz	\$ 96.20
1100-SRXF	230V AC, 50/60Hz	\$ 96.20

SIDE MOUNTED AUXILIARY CONTACTS WITH ALARM



This accessory provides remote indication when a circuit breaker or supplementary protector is tripped. The trip can be a result of an overload, short-circuit, operation of shunt-trip module. Features IP20 guarded terminals to protect against accidental contact with live parts and snaps-on and installs without the use of tools.

Ratings: AC12 - 3A @ 400V AC (50/60Hz)
6A @ 230V AC (50/60Hz)

CODE	DESCRIPTION	LIST
1100-STA211	1 Normally Open and 1 Normally Closed	\$ 67.60

DISCOUNT
SCHEDULE

F



SPECIFICATIONS:

ELECTRICAL, MECHANICAL, ENVIRONMENTAL & CONSTRUCTION				
		1 POLE	2 POLE	4 POLE
ELECTRICAL GENERAL				
	UNITS			
Rated Operating Current	A	0.5 ~ 63		
Electrical Life	Ops.	6,000		
Tripping Curves		C, D		
ELECTRICAL UL/CSA APPLICATIONS				
Conformity to Standards		UL 489B, CSA C22.2 No. 305 as Photovoltaic Breakers		
DC Rated Operating Voltage	VDC	250	500	1000
MAXIMUM SHORT CIRCUIT RATING				
@ 250 VDC	kA	10		
@ 500 VDC	kA	10		
@ 750 VDC	kA	10		
@ 1000 VDC	kA	10		
MECHANICAL				
Mechanical Endurance	Ops.	20,000		
ENVIRONMENTAL				
Ambient Operating Temperature	°C / °F	-20 to 50 / -4 to 122		
Ambient Storage Temperature	°C / °F	-25 to 80 / -13 to 176		
Calibration Temperature	°C / °F	40 / 104		
Altitude	m / ft.	2,000 / 6,562		
Shock	G	15		
CONSTRUCTION				
Poles (availability)		1, 2, 3 and 4 Pole		
Mounting		Standard 35mm DIN Rail		
Width of MCB		17.5mm		
Terminal Screws		Captive		
INGRESS PROTECTION				
Line & Load Terminations	IP	20		
WEIGHT				
	kgs	0.125	0.25	0.50
	lbs	0.275	0.55	1.10
CONDUCTOR SIZE				
UL/CSA	AWG	1 x #18 ~ #3, 2 x #18 ~ #10		
Solid, Stranded, Fine Stranded	mm ²	1 x 0.82 ~ 26.7		
TERMINAL WIRING CONNECTION				
Wire Type		Copper wire only, 75°C		
TERMINAL TORQUE				
	Nm / lb-in.	2.5 / 22.2		
CONTACT INDICATION		Green and Red		
DESIGN		Trip Free Design (breaker cannot be defeated by holding the handle in the "ON" position)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to c3controls.com		

TRIP CURVES


TRIP CURVE C

TRIP CURVE D

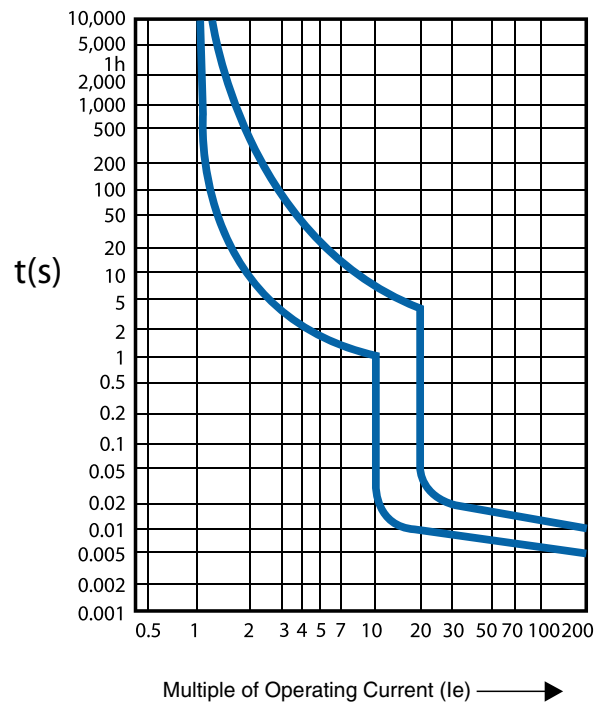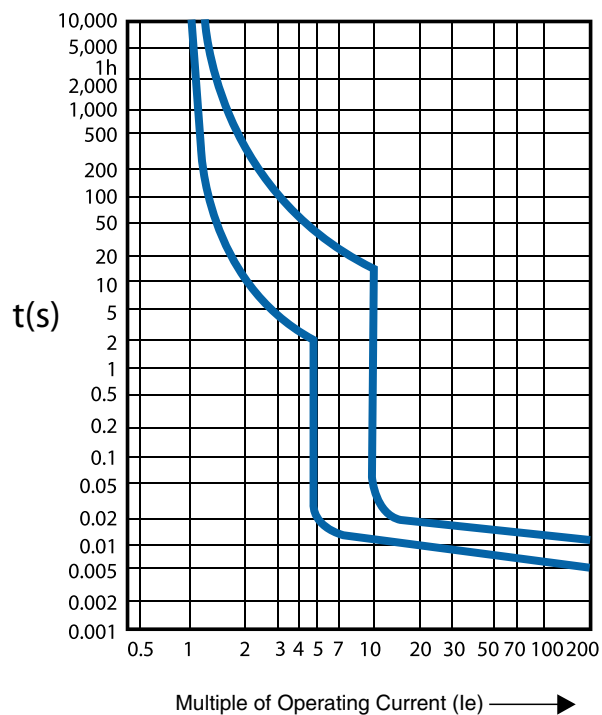


**CIRCUIT DIAGRAM
- 1 POLE**

1110-CB1*2***




**CIRCUIT DIAGRAMS
- 2 POLE**


1110-CB2*2****



1110-CB2*2***-SB

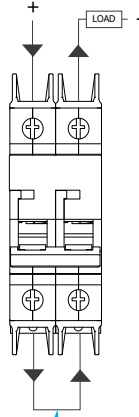


1110-CB2*2***-ST

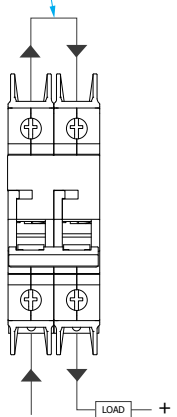


NOTE: **** Represents the trip curve and operating current codes. Refer to page 4.

CIRCUIT DIAGRAMS - 4 POLE


1110-CB4*2***-STLT

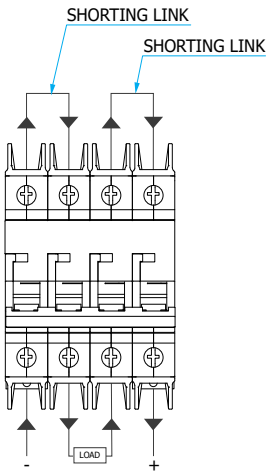


1110-CB4*2***-SBB

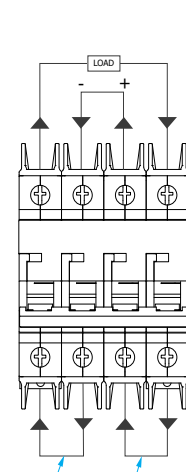


1110-CB4*2***-SBLB

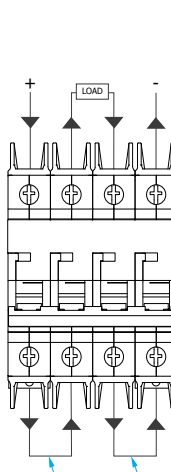

1110-CB4*2***-SBTB

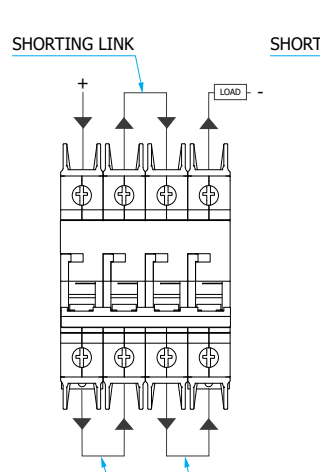


1110-CB4*2***-STBT

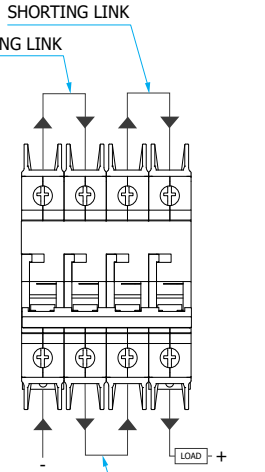


NOTE: **** Represents the trip curve and operating current codes. Refer to page 4.

UL 489B BRANCH CIRCUIT BREAKER

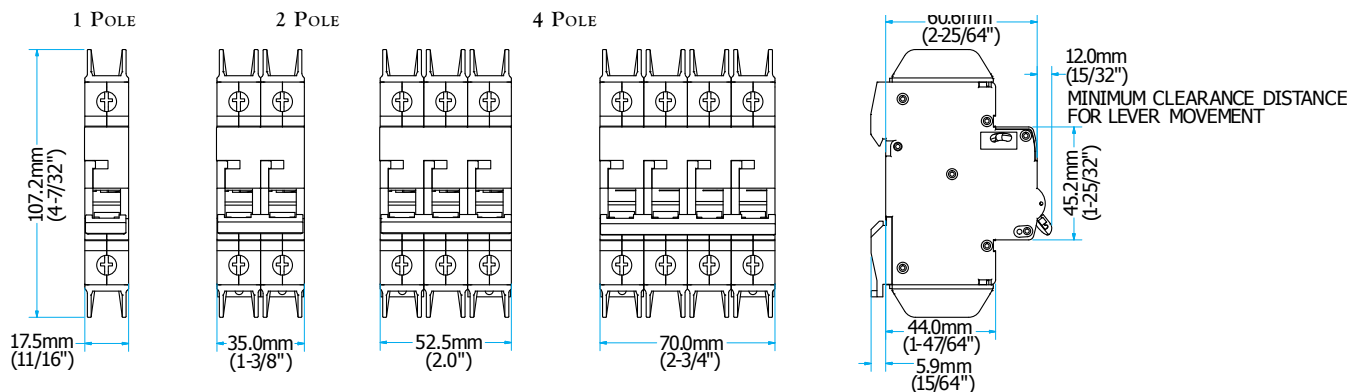


**SIDE MOUNTED
AUXILIARY CONTACT**

1100-SA211

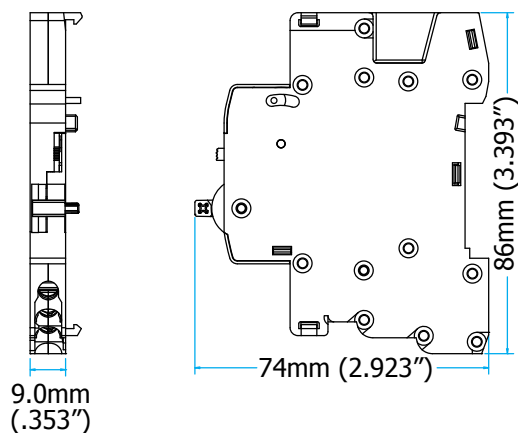

**SIDE MOUNTED
SHUNT-TRIP MODULES**

1100-SRXD & 1100-SRXF

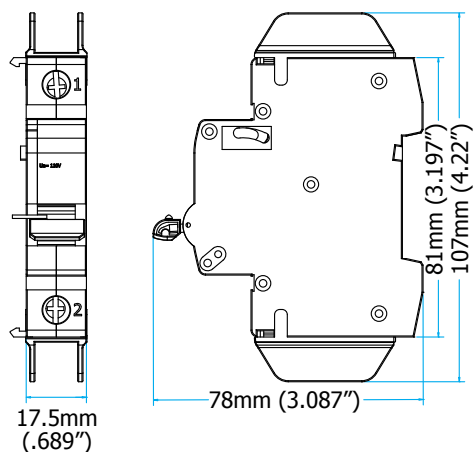

SIDE MOUNTED AUXILIARY CONTACT WITH ALARM

1100-STA211

