


VIEW1 - Enclosure With Cover On
SCALE 1/2

Customer to make connections.
See pg 2 for details.


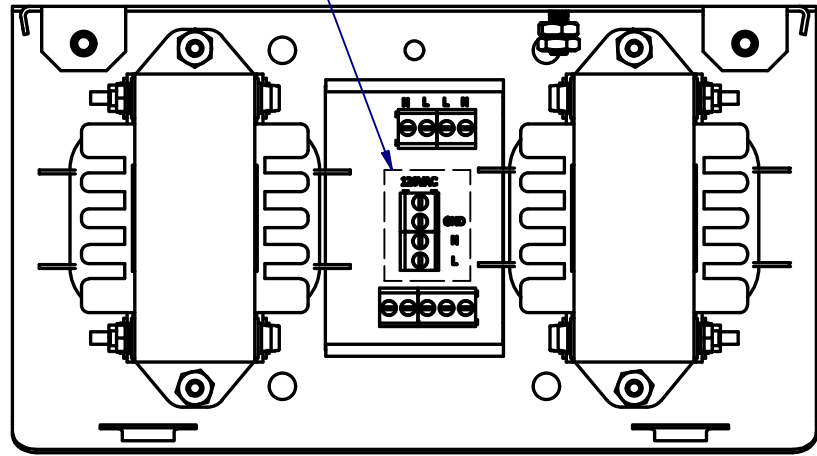


VIEW2 - Enclosure With Cover Off
SCALE 1/2

WARNING

- * Disconnect Power before proceeding with any work on this equipment.
- * Installation and maintenance by technical personnel only.
- * Installation of c3controls product must be in accordance with the NEC (U.S. National Electrical Code) regulations or local codes/standards per your application.
- * Any violation of these safety requirements could result in a personal injury and/or result in damage to the equipment.

VIEW3 - Enclosure With Cover On
 SCALE 1/2

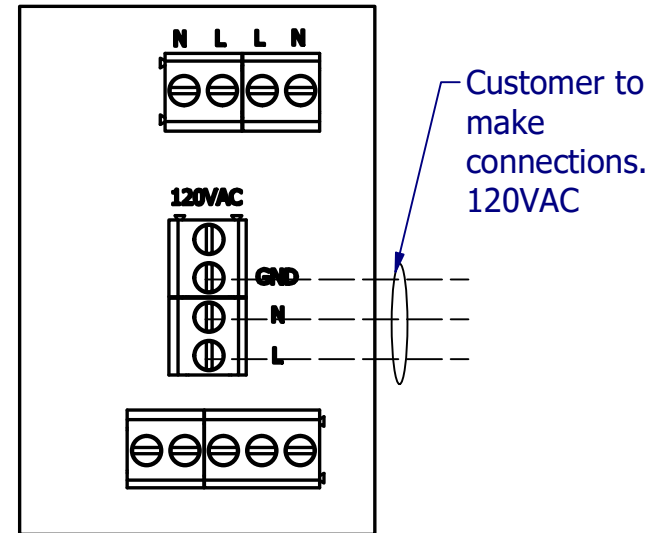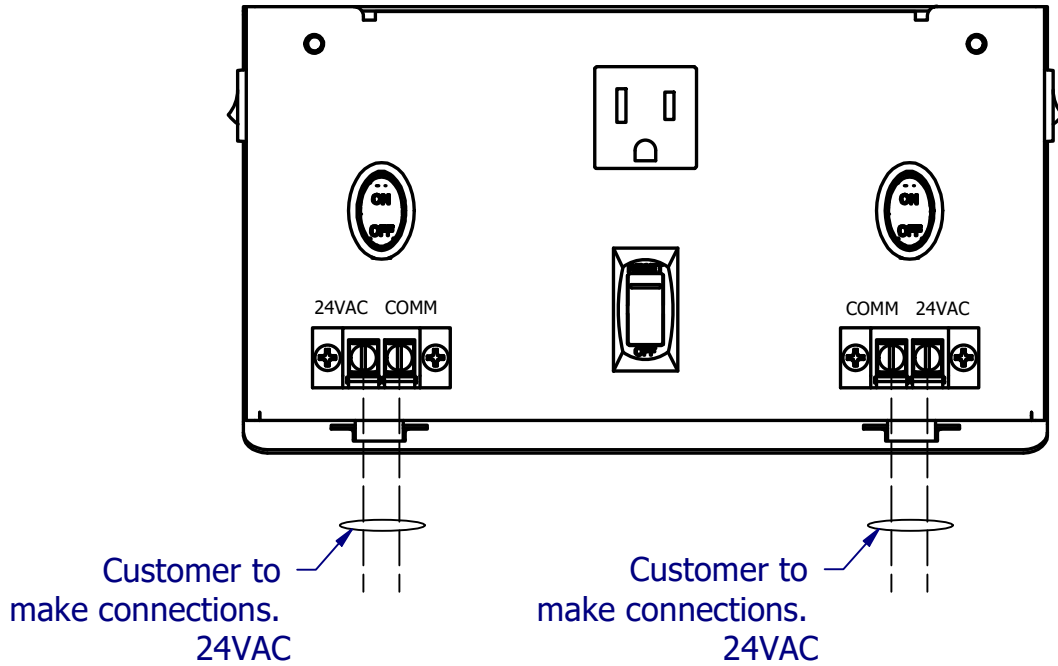

VIEW4 - PCBA Connections
 SCALE 1 : 1

Recommended Wiring Information


For PCBA Wiring:

- Use 24-12 AWG wire.
- Use 60/75°C Solid or Stranded Copper Conductors only.
- Wire Strip Length: 7/0.28 (mm/in).
- Terminal Torque: 0.5/6 (Nm/lb-in).


For Block Connector Wiring (Located on Cover):

- Use 22-12 AWG wire.
- Use 60/75°C Solid or Stranded Copper Conductors only.
- Wire Strip Length: 9/0.35 (mm/in).
- Terminal Torque: 0.8/7 (Nm/lb-in).


VIEW7 - Enclosure Top View
 SCALE 1/2

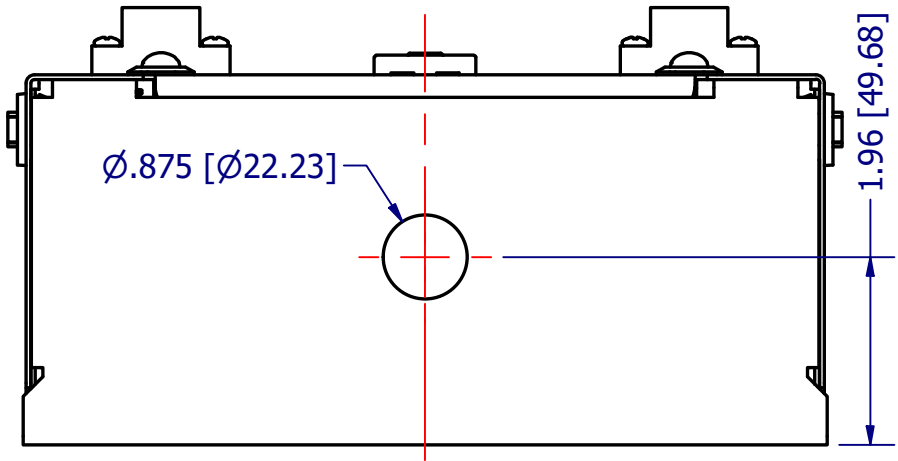

VIEW5 - Enclosure Back View
 SCALE 1/2

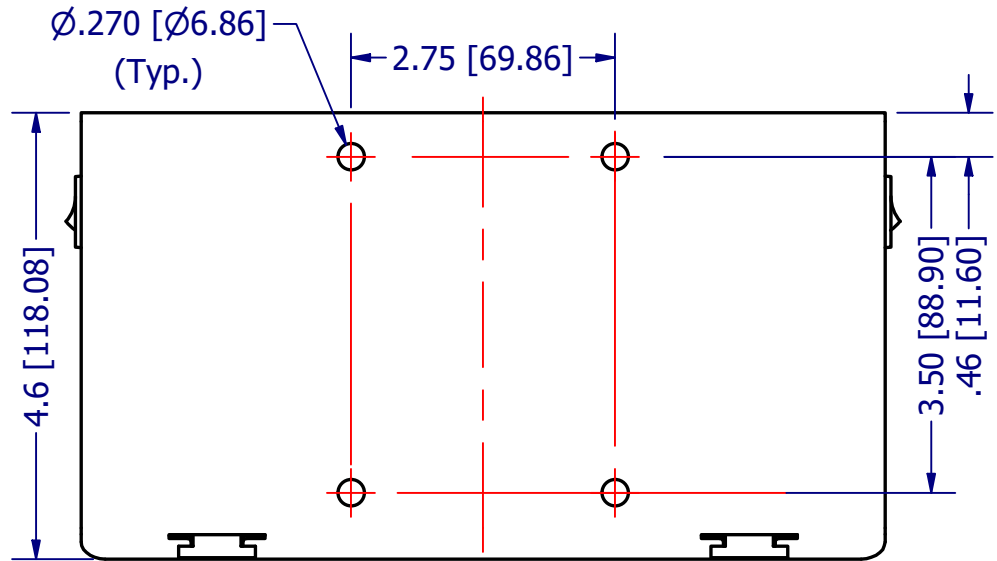

VIEW6 - Enclosure Bottom View
 SCALE 1/2

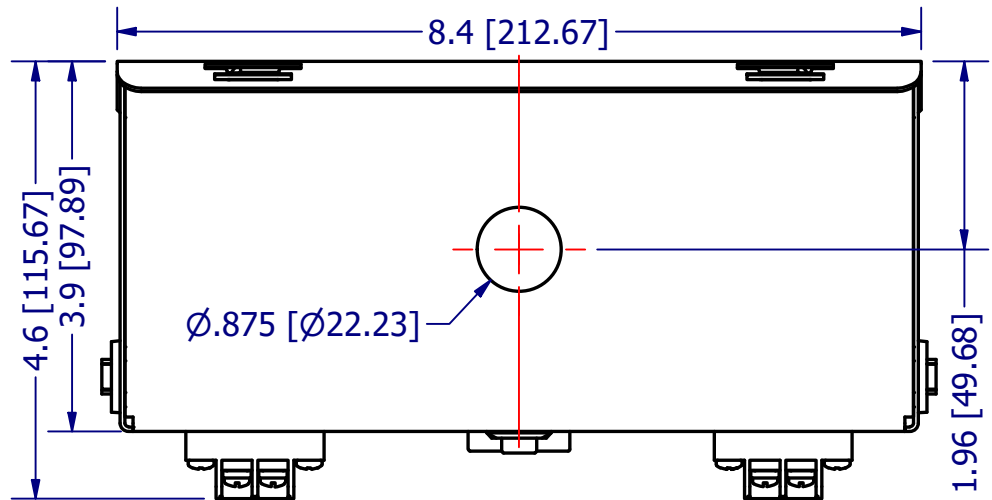

TOLERANCE

Dimensions: in [mm]
 X.X +/- 0.040 [1.00]
 X.XX +/- 0.010 [0.25]
 X.XXX +/- 0.005 [0.13]
 X.XXXX +/- 0.001 [0.03]
 ANGLES +/- 0.5 DEG
 UNLESS OTHERWISE
 SPECIFIED