
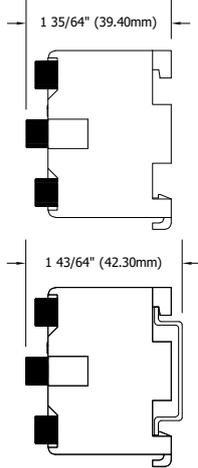


## Product Overall Dimensions

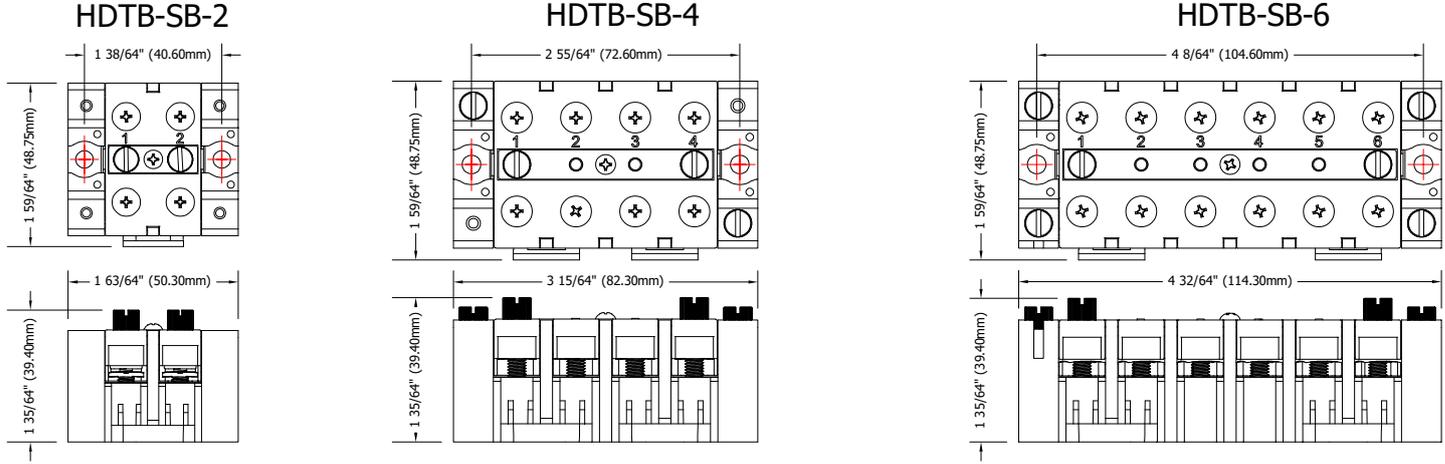

PANEL MOUNT


DIN RAIL MOUNT

## PRODUCT RATINGS

OPERATING TEMPERATURE	: -20 TO 80° C
MAXIMUM VOLTAGE	: (V):600
MAXIMUM CURRENT	: (A):60 (prepared wire) : (A):30 (Unprepared wire)
CONDUCTOR RANGE WIRE:	: #18 to #6 AWG (prepared wire) : #18 to #10 AWG (unprepared wire)
RING LUG:	: #12, 1/4", M5 & M6 (Max OD 0.496"/12.0mm) (Min ID 0.210"/5.3mm)
WIRE STRIP LENGTH:	: 5/16"
TERMINAL GUARD:	: IP20
TERMINAL TORQUE:	: 23 lb-in. [2.60 Nm] - Max
THUMB SCREW TORQUE:	: 4.4 lb-in. [0.50 Nm] - Max

## INSTALLATION INSTRUCTIONS

### DIN RAIL INSTALLATION

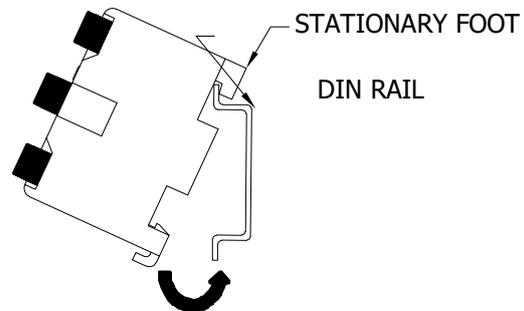

LATCH STATIONARY FOOT ONTO DIN RAIL,  
THEN ROTATE THE TERMINAL BLOCK UNTIL  
THE BOTTOM FOOT ENGAGES

