

DEFINITE PURPOSE CONTACTORS



SERIES 280 & 290 PRODUCT PROFILE

c3controls **Series 280 and Series 290 Definite Purpose Contactors** are designed to meet your power switching application, right down to the number of power poles. Commonly used in the HVAC industry, definite purpose contactors can help you save money and a premium panel space. Just look and see what our new line has to offer!



DELIVERING SUPERIOR PRODUCT QUALITY AND MANUFACTURING EXCELLENCE

✓ Proven	Our Series 280 and 290 Definite Purpose Contactors are UL Recognized, meeting essential standards requirements. 
✓ Compact Size	Reduced panel area for lower installed costs. Maximum three (3) frame sizes per pole for devices rated from 20A to 90A.
✓ Lower Cost	Definite purpose contactors are a lower cost alternative when compared to 3-pole standard contactors.
✓ Flexibility	Available in multiple pole configurations, up to 3 to meet your application needs.
✓ Easy to Install	Panel-mountable with four screws, one in each corner, for fast and simple installation.
✓ Visible Certifications	Our product certifications and electrical ratings are clearly marked on the outside of the device for easy reference during installation.
✓ Added Safety	The durable, impact-resistant Class F-type contactor frame is insulated to guard against physical or electrical damage.
✓ 36-Month Warranty*	Every product is backed by our 36-Month Warranty—giving you confidence in the quality, reliability, and performance of components designed for the most demanding applications.
✓ Guaranteed Availability*	Any order for standard catalog items received by 6:00pm ET is guaranteed to ship same-day. NOTE: Not all items are available for guaranteed same-day shipping, consult factory for the details.
✓ Advantage Pricing	Our approach to product development, manufacturing, and focus on servicing the OEM and Electrical Equipment Builder reduces cost. The result—the best value in the industry.

*See c3controls Terms & Conditions

UNIQUE FEATURES

Multiple Pole Configurations

- With 1-, 2-, and 3-pole configurations available, a more accurate contactor can now be chosen, leading to cost savings and a smaller dimensional footprint compared to a 3-pole only contactor.

Single Pole Contactor with Shunt

- Single pole contactors include a shunt for termination and feed-through of Neutral line.

Added Safety

- The durable, impact-resistant Class F-type contactor frame is insulated to guard against physical and electrical damage.

Integrated Mechanical Interlock

- Series 290 Reversing Contactors include an Integrated Mechanical Interlock to avoid simultaneous switching of both the frames.

Ease of Connection

- Quick connect and box lug wire terminals will help reduce your installation costs and enhance the features and performance of your equipment.

Quick Identification

- Clear markings and visible labels ensure quick identification of the product, simplifying troubleshooting in panels with many devices.



c3controls[®]

Copyright © 2022 c3controls. All Rights Reserved.

724.775.7926 | c3controls.com

REVISION 07.2026



DEFINITE PURPOSE CONTACTORS

SPECIFICATIONS

		1-, 2- & 3-POLE AND 3 + 3-POLE, DUAL FRAME												2- & 3-POLE											
	UNITS	20A			25A			30A			40A			50A		60A		75A		90A					
KEY SPECIFICATIONS																									
Full Load Amps (FLA)																									
240/277V AC	A	20			25			30			40			50		60		75		90					
480V AC	A	20			25			30			40			50		60		75		90					
600V AC	A	20			25			30			40			50		60		75		90					
Resistive Load Amps	A	20			25			30			40			65		75		90		120					
Locked Rotor Amps																									
240/277V AC	A	120			150			180			240			300		360		450		540					
480V AC	A	100			125			150			200			250		300		375		450					
600V AC	A	80			100			120			160			200		240		300		360					
Power Pole Wire Terminals (for all Line and Load Terminals)		Phillips/Slotted/Socket Screw										Box Lug with Hex Drive Box Lug Screws						Box Lug with Slotted Drive Box Lug Screws							
Quick Connects per Terminal																									
Coil Terminals (+/-)	Blades	2/2																							
Power Poles		4 (for 1- & 2-Pole devices) and 2 (for 3- & 3+3 Pole devices)																							
		1-POLE				2-POLE				3-POLE				2- & 3-POLE											
	UNITS	Up to 40 FLA						Up to 40 FLA						50A & 60A				75A & 90A							
COIL CHARACTERISTICS																									
Nominal Coil Voltage	V	24	120	208/240	277	24	120	208/240	277	24	120	208/240	277	24	120	208/240	277	24	120	208/240	277				
Maximum Pickup Voltage	V	18	88	177	221	18	88	177	221	18	88	177	220	18	88	177	220	18	93	177	235				
Drop-Out Voltage Range	V	6-15	20-70	40-140	50-165	6-15	20-70	40-140	50-165	6-15	20-70	40-140	65-185	6-15	20-70	40-140	65-185	6-15	20-70	40-135	50-180				
NOMINAL INRUSH																									
VA @ 50Hz		31			35	31	22			65			65			140			285						
VA @ 60Hz		28			32	28	20			60			60			132			240						
NOMINAL SEALED																									
VA @ 50Hz		6			7	6	5.5			7.5			7.5			20			42						
VA @ 60Hz		5			6	5	4.5			6			6			14			27						
Nominal Resistance	Ohms	18	420	1800	2500	11	237	1000	1600	7	180	720	900	7	180	720	900	2.3	53	180	280				
Maximum Coil Voltage	V	30	132	264	300	30	132	264	300	30	132	264	300	30	132	264	300	30	132	264	300				
OTHER CHARACTERISTICS		20-30 FLA				40 FLA				20-30 FLA				40 FLA				50 FLA & 60 FLA				75 FLA & 90 FLA			
Line & Load Terminals		#10-32 Screw						Box Lug						#10-32 Screw						Box Lug					
Wire Size (Min.-Max.)	AWG	16-8*				14-4 Cu/Al				16-8*				14-4 Cu/Al				14-2 Cu/Al				14-1 Cu/Al			
Tightening Torque (Recommended)	Lb-in.	25				40				25				40				50							
Insulation System	°C	130 (Class B)																							
Permissible Ambient Temperature	°C	-40 to 65																							
Altitude	m	2000																							
Ingress Protection	IP	20																							
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com .																							


*Stranding must be split for #8 wire

For complete ratings and detailed specifications refer to www.c3controls.com.

DIMENSIONS


1 Pole Non-Reversing

280-D20N1N, 280-D25N1N & 280-D30N1N (20A - 30A)

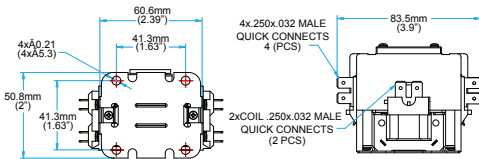


2 Pole Non-Reversing

280-D20N2, 280-D25N2 & 280-D30N2 (20A - 30A)

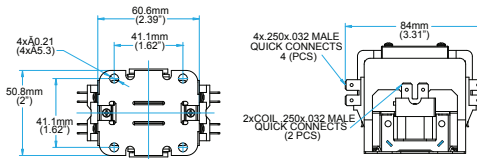

3 Pole Non-Reversing

280-D20N3, 280-D25N3 & 280-D30N3 (20A - 30A)

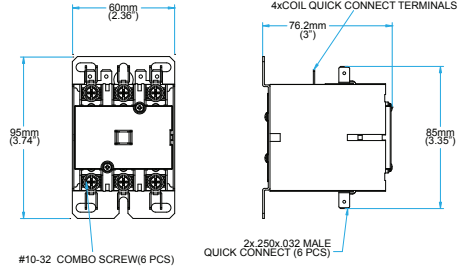

CERTIFICATIONS

Conformity to Standards:

UL 508
CSA C22.2 No. 14-10

Certifications:

UL File #: E236197 (Guide NLDX2, NLDX8)



Visit www.c3controls.com to download product certifications.



c3controls

Copyright © 2022 c3controls. All Rights Reserved.

724.775.7926 | www.c3controls.com