

BIMETALLIC OVERLOAD RELAYS



SERIES 320 PRODUCT PROFILE

c3controls Series 320 Overload Relays provide thermal Trip Class 10 overload protection for single and three phase motors, and phase loss protection for three phase motors. Other features like IP20 guarded terminals with dual terminal markings, integral stop button, and direct mounting will help you reduce your total installed costs and enhance the features and performance of your equipment.



DELIVERING SUPERIOR PRODUCT QUALITY AND MANUFACTURING EXCELLENCE

✓ Proven	Our Series 320 Overload Relays are UL Listed and CE marked meeting global standards requirements.
✓ Reliability	Trip Class 10 for reliable and accurate protection against overload conditions. Trips within 10 seconds when carrying a current of 720%.
✓ Trip Indication	Visible trip indication to provide clear indication of what device tripped, simplifies troubleshooting in panels.
✓ Visible Markings	High visibility labels and markings; dual IEC and NEMA terminal markings for ease of wiring anywhere in the world.
✓ Modular Design	Modular design allows Series 320 Overload Relays to be direct mounted onto Series 300 Contactors.
✓ Visible Certifications	Our product certifications and electrical ratings are clearly marked on the outside of the devices for easy reference during installation.
✓ Added Safety	IP20 guarded terminals with dual terminal markings prevent accidental contact with live parts.
✓ Lifetime Warranty*	Every product is backed by our lifetime warranty—unmatched in the industry—bringing you quality components that perform in the most demanding applications.
✓ Guaranteed Same-Day Shipping*	Product availability reduces inventory, and improves cash-flow—saving you money. With c3controls any order for standard catalog items received by 6:00pm ET is guaranteed to ship same-day.
✓ Advantage Pricing	Our approach to product development, manufacturing, and focus on servicing the OEM and Electrical Equipment Builder reduces cost. The result—the best value in the industry.

*See c3controls Terms & Conditions

MULTIPLE FUNCTION ADVANTAGES

High Fault SCCR

- High fault short circuit current rating of 100kA @ 480V and 600V with Class J fuses, provides safety and reliability in high fault applications.

Adjustable Current Setting

- Full load current adjustment ratio of approximately 1:1.5 enables overload relay to be set to exact FLA of motor.

Phase Loss Sensitivity

- Single phase sensitivity to protect motors against damaging phase loss conditions.

Selectable Reset Mode

- Manual or automatic reset and test modes, and stop button all in a single device for convenient control circuit wiring.

Seamless Compatibility

- Series 320-B2 Overload Relays direct mount onto all Series 300 Non-Reversing and Series 310, 9A to 25A AC/DC, Reversing Contactors and Series 320-B1 Overload Relays direct mount onto all Series 300/310 Miniature Non-Reversing and Reversing Contactors.

Trip Test Function

- Trip test function standard on all c3controls Series 320-B2 to 320-B5, allows for easier installation, testing, and troubleshooting.



c3controls[®]

Copyright © 2022 c3controls. All Rights Reserved.

724.775.7926 | www.c3controls.com



BIMETALLIC OVERLOAD RELAYS


SPECIFICATIONS

		320-B1	320-B2	320-B3	320-B4	320-B5
UNITS						
ELECTRICAL GENERAL						
Current Setting Range	A	0.28 ~ 17	0.28 ~ 32	25 ~ 50	40 ~ 80	63 ~ 112
Operating Frequency	Hz	0 ~ 400				
Power Dissipation per Pole	W	0.9 ~ 1.4	1.3 ~ 2.0	1.3 ~ 2.0	1.9 ~ 4.8	3 ~ 4.8
ELECTRICAL UL/CSA APPLICATIONS						
MAIN CIRCUITS						
Rated Operating Voltage, Ue	VAC	600				
Standard Short Circuit Current	kA	5	5	5	10	10
Max. Fuse Size *	A	60	90	125	200	250
High Fault Short Circuit Current	kA	100				
Max. Fuse Size * (Class J)	A	30	60	60	100	150
CONTROL CIRCUITS						
Pilot Duty Rating		AC: C600		DC: R300		
ELECTRICAL IEC APPLICATIONS						
MAIN CIRCUITS						
Rated Insulation Voltage, Ui	V	690				
Rated Impulse Voltage, Uimp	kV	6				
Rated Operating Voltage, Ue	VAC	690				
Max. Rated Operating Current, Ie	A	17	32	50	80	112
Max. Fuse Size *	A	40	63	100	125	250
CONTROL CIRCUITS						
Rated Insulation Voltage, Ui	V	690				
Rated Operating Current, Ie						
@ 24V	A	AC-15 : 4		DC-13 : 1		
@ 48V	A	AC-15 : 3.5		DC-13 : 0.5		
@ 60V	A	AC-15 : 3.5		DC-13 : 0.5		
@ 110V	A	DC-13 : 0.25				
@ 120V	A	AC-15 : 3				
@ 220V	A	DC-13 : 0.1				
@ 230V	A	AC-15 : 2				
@ 250V	A	DC-13 : 0.1				
@ 400V	A	AC-15 : 1.5				
@ 500V	A	AC-15 : 0.5				
@ 690V	A	AC-15 : 0.3				
Max. Fuse Size (gL/gG)	A	6				
ENVIRONMENTAL						
Ambient Operating Temp.	°C / °F	-25 to +60 / -13 to +140				
Ambient Storage Temp.	°C / °F	-40 to +70 / -40 to +158				
Altitude	m / ft.	2,000 / 6,562				
CONSTRUCTION						
Number of Poles	uL	3				
Trip Class	uL	10				
ROHS COMPLIANCE For RoHS compliance documentation by product, refer to www.c3controls.com .						
* Varies by current adjustment range of overload relay.						


For complete ratings and detailed specifications refer to www.c3controls.com.

DIMENSIONS

Series 320-B1

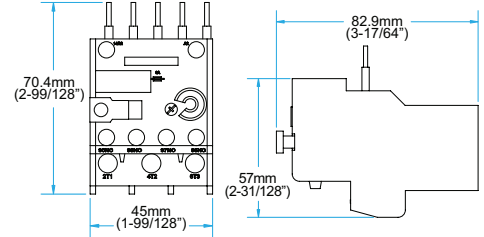


Series 320-B2

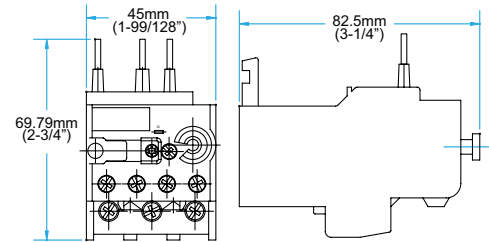

TRIP CHARACTERISTICS

For Series 320-B1, 320-B2, 320-B3, & 320-B4.

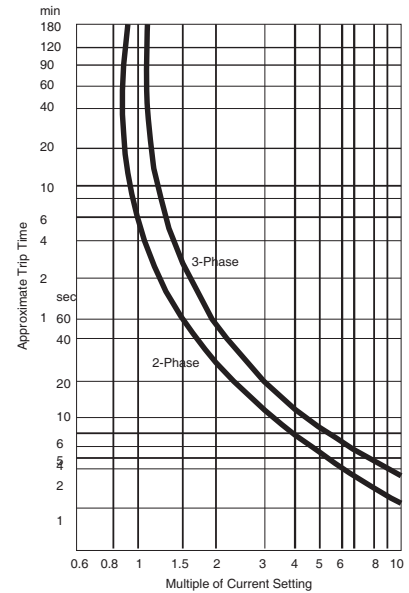

PROVEN

Conformity to Standards:

UL 508, 60947-4-1A
CSA C22.2 No. 14
IEC 60947-1, 60947-4-1

Certifications:

UL File #: E68568 (Guide NKCR, NKCR7)
CE Marked (per EU Low Voltage Directive 2006/95/EC and RoHS Directive 2011/65/EU)



Visit c3controls.com to download product certifications.



Copyright © 2022 c3controls. All Rights Reserved.
724.775.7926 | www.c3controls.com