

TERMINAL BLOCK RELAYS



SERIES TBR PRODUCT PROFILE

c3controls **Terminal Block Relays** are designed to meet your control and automation system requirements, which need reliable, safe connections as well as isolation between electronic controls and process I/O. Due to their unmatched size, flexibility, and various other features, terminal block relays can help you save money and premium panel space. Just look and see what Series TBR has to offer!



DELIVERING SUPERIOR PRODUCT QUALITY AND MANUFACTURING EXCELLENCE

✓ Proven	Our Terminal Block Relays are UL Recognized and CE marked, meeting global standards requirements.
✓ Ultra Compact Size	Only 6.2mm width for a Single-Pole, Double-Throw relay, allowing you to control more devices and uses less space.
✓ Flexibility	Pluggable relay attached on the socket can be replaced in case of malfunction, providing flexibility for repair or maintenance work.
✓ Secure Installation	Quick and simple snap-on installation on a 35mm DIN Rail.
✓ Clear Visibility	LED indication allows you to see the contact status of the relay, making it very helpful in troubleshooting.
✓ Visible Certifications	Our product certifications and electrical ratings are clearly marked on the side of the device for easy reference during installation.
✓ Added Safety	Terminals are IP20 rated, guarding against accidental contact with live parts. The pluggable relay is also IP67 rated making it reliable in extreme conditions.
✓ 36-Month Warranty*	Every product is backed by our 36-Month Warranty—giving you confidence in the quality, reliability, and performance of components designed for the most demanding applications.
✓ Guaranteed Same-Day Shipping*	Product availability reduces inventory, and improves cash-flow—saving you money. With c3controls any order for standard catalog items received by 6:00pm ET is guaranteed to ship same-day.
✓ Advantage Pricing	Our approach to product development, manufacturing, and focus on servicing the OEM and Electrical Equipment Builder reduces cost. The result—the best value in the industry.

*See c3controls Terms & Conditions

UNIQUE FEATURES

Super Bright LED

- Highly visible and bright LED on each unit gives indication of the relay's operating state.

Easy Reference

- All the necessary installation markings including wire size and torque are available on the side of each terminal block relay.

Quick Identification

- Marking system allows for fast and easy circuit identification. A marking strip is pre-supplied on each unit.

Pluggable Relay

- The marker base functions as a lever for installing or replacing the relay in case of troubleshooting or malfunction.

Protection

- Built-in Leakage Current Suppression and Coil Surge Protection.

Accessories

- Apart from the replacement relay, marker and separator, Series TBR consists of a jumper accessory to eliminate labor intensive wiring work.



c3controls®

Copyright © 2022 c3controls. All Rights Reserved.

724.775.7926 | c3controls.com

REVISION 07.2026




TERMINAL BLOCK RELAYS

SPECIFICATIONS


TERMINAL BLOCK RELAYS					
	UNITS				
INPUT DATA					
Rated Voltage	VAC/VDC	12	24	110~125V	220~240
Typical Response Time	ms			≤8	
Typical Release Time	ms			≤4	
Pickup Voltage	%			90	
Dropout Voltage	%			10	
Maximum Allowable Voltage	VAC/VDC	14	28	132	264
Coil Consumption	W		0.17		0.21
CONTACT RATINGS					
Contact Configuration				SPDT	
Contact Material				AgNi	
Rated Load				6A, 250VAC / 30VDC	
Maximum Switching Voltage	VAC/VDC			400/125	
Maximum Switching Power	VA/W			1500/180	
Minimum Switching Voltage	V			5	
Minimum Switching Current	mA			100	
GENERAL					
Mechanical Service Life				1 x 10 ⁷ cycles	
ELECTRICAL LIFE					
NO Operations				3 x 10 ⁴ cycles	
NC Operations				1 x 10 ⁴ cycles	
DIELECTRIC STRENGTH					
Between Contact and Coil	VAC			4,000 for 1 minute	
Between Pole	VAC			1,000 for 1 minute	
Vibration Resistance				10 to 55Hz, double amplitude 1.0 mm	
SHOCK RESISTANCE					
Functional	m/s ²			49	
Destructive	m/s ²			980	
Ambient Temperature Range	°C/°F			-40 to 55 / -40 to 131	
Storage Temperature	°C/°F			-40 to 85 / -40 to 185	
Operating Humidity	%			5 to 85 (no condensation)	
Altitude	m			0 - 2,000	
Pollution Degree				2	
Maximum Wire Size	AWG			14	
Torque	Nm			0.5	
Degree of Protection				IP20	
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com			

For complete ratings and detailed specifications refer to www.c3controls.com.

DIMENSIONS

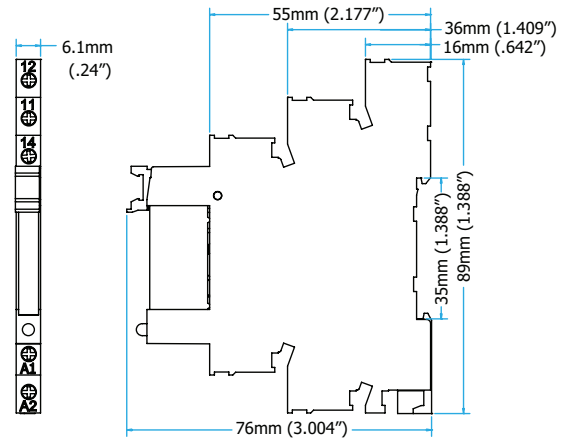

WIRING DIAGRAM

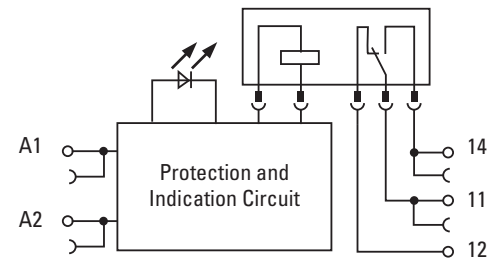

CERTIFICATIONS

Conformity to Standards:

Socket
UL 508
CSA 22.2 No. 14
IEC 60947-1, 60947-5-1

Certifications:

UL File #: E236196 (Guide SWIV2, SWIV8)
CE Marked (per EU Low Voltage Directive 2014/35/EU and RoHS Directive EU 2015/863)



c3controls[®]

Copyright © 2022 c3controls. All Rights Reserved.

724.775.7926 | www.c3controls.com

REVISION 04. 2022