


1/8" 3
 3/16" 2
 1/4" 1
 * REMOVE ONE ADDITIONAL GASKET WHEN USING A LEGEND PLATE

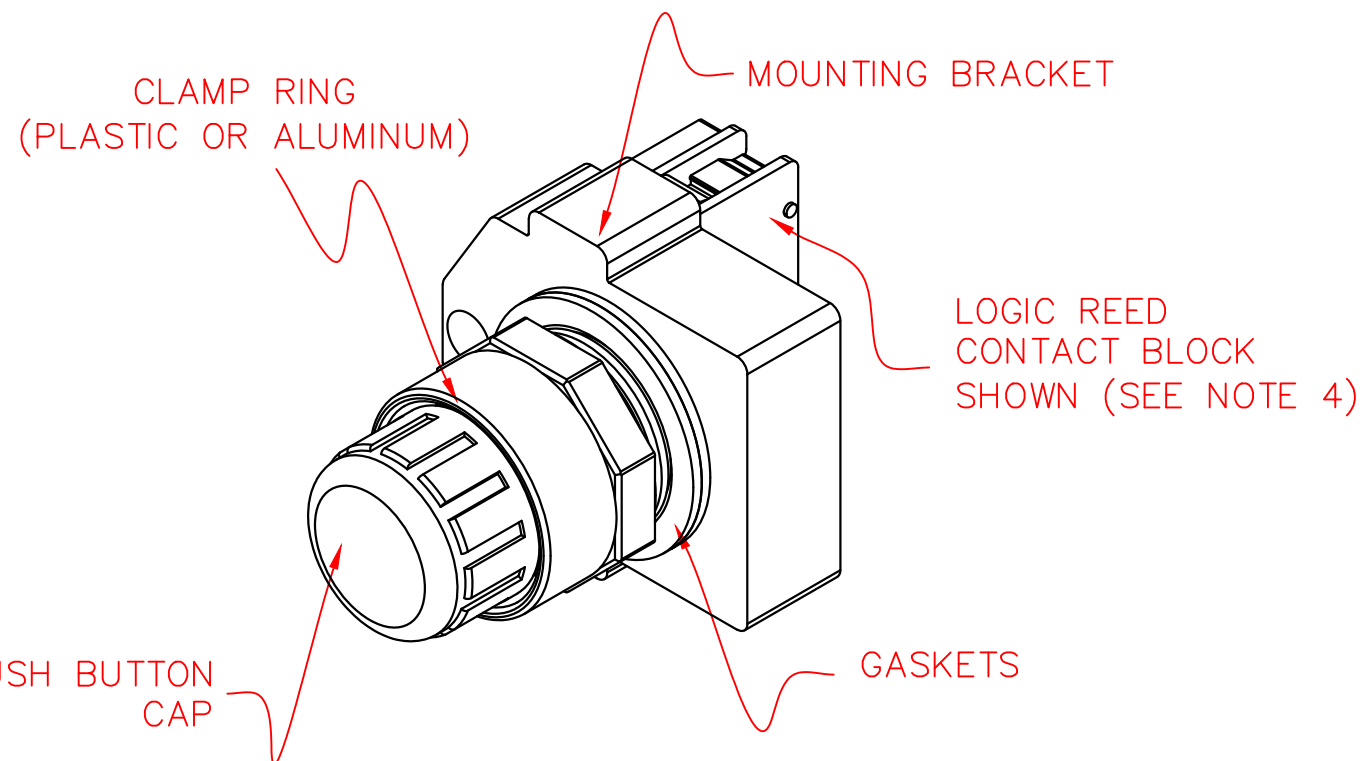

NOTES:

- 1) MOUNTING HOLE IN PANEL - ϕ 1-3/16 (30MM)
- 2) MOUNTING HOLE SPACING (FOR STANDARD LEGEND PLATES) - HORIZONTAL & VERTICAL DISTANCE - 2.250 CENTER TO CENTER
- 3) CHOICE OF ALUMINUM OR PLASTIC CLAMP RING (NEMA 4 OR NEMA 4X).
- 4) CHOICE OF CONTACT BLOCKS INCLUDE: LOGIC REED, MID-POWER / POWER REED AND FACTORY SEALED CONTACT BLOCK

XXX	XXXXXXXXXX	XXX	XXX	30MM PRODUCT LINE FULL VOLTAGE ILLUMINATED PUSH BUTTON DATA SHEET	
XXX	XXXXXXXXXX	XXX	XXX		
XXX	XXXXXXXXXX	XXX	XXX		
XXX	XXXXXXXXXX	XXX	XXX		
XXX	XXXXXXXXXX	XXX	XXX		
REV	DESCRIPTION	DATE	BY	DRAWN BY: RCG	DATE: 09-06-01

CONTROL CONCEPTS CORP.

P.O. BOX 496
 664 STATE STREET
 BEAVER, PA 15009



SCALE:
1:1

DRAWING NO.
WC100162