

# MINIATURE CIRCUIT BREAKERS

series  
**1100**

## SERIES 1100 PRODUCT PROFILE

c3controls offers a comprehensive line of **Miniature Circuit Breakers** designed and manufactured to meet the needs of the machine builder. We promise durable products at a price that gives you an edge, and we guarantee same-day shipping. Check out all the features of our Series 1100 Miniature Circuit Breakers below!

### DELIVERING SUPERIOR PRODUCT QUALITY AND MANUFACTURING EXCELLENCE

✓ <b>Proven</b>	Our Series 1100 Miniature Circuit Breakers are UL Listed and Recognized, and CE marked to meet global standards requirements and are compliant to the RoHS directives. 
✓ <b>Compact Design</b>	17.5mm wide per pole construction for reduced panel size, allowing for smaller control panels.
✓ <b>Easy to Install</b>	35mm DIN rail mounting for fast and easy installation and removal.
✓ <b>Visible Markings</b>	High visibility labels and markings; product part number, amperage, and UL & IEC short circuit ratings can be seen from the front and side of the device for easy identification.
✓ <b>Added Safety</b>	Line and load side IP20 guarded finger-safe terminals prevent accidental contact with live parts, while allowing ring, fork, and bare wire connections.
✓ <b>Limited Lifetime Warranty*</b>	Every product is backed by our lifetime warranty—unmatched in the industry—bringing you quality components that perform in the most demanding applications.
✓ <b>Guaranteed Same-Day Shipping*</b>	Product availability reduces inventory, and improves cash-flow—saving you money. With c3controls any order for standard catalog items received by 6:00pm ET is guaranteed to ship same-day.
✓ <b>Advantage Pricing</b>	Our approach to product development, manufacturing, and focus on servicing the OEM and Electrical Equipment Builder reduces cost. The result—the best value in the industry.

\*See c3controls Terms & Conditions



### UNIQUE FEATURES

#### Full Range Circuit Protection

- Available in single pole, single pole + neutral, two pole, three pole, and three pole + neutral constructions and includes both thermal and magnetic trip elements for overload and short circuit protection.

#### Industry-Leading Short Circuit Rating

- 10kA @480Y/277V short circuit current rating on all multi-pole constructions – the highest interruption rating available in the market.

#### Trip-Free Design

- Holding the operating handle in the ON position will not prevent the miniature circuit breaker from tripping.

#### Easy Wiring

- Captive screws make it impossible to lose screws when wiring and our box lug design terminals will accept a wide-range of copper wire sizes. Line/load wiring is reversible for ease of use.

#### Visible Markings & Status Indication

- High visibility labels and markings can be seen from the front and side of the device for easy installation. Color-coded status window for clear visual of the breaker status.

#### Snap-On Accessories and Bus Bars

- Snap-on accessories are easily installed without the use of tools, further the bus bars also help lower assembly and installation costs.



**c3controls**<sup>®</sup>

Copyright © 2022 c3controls. All Rights Reserved.

724.775.7926 | [www.c3controls.com](http://www.c3controls.com)

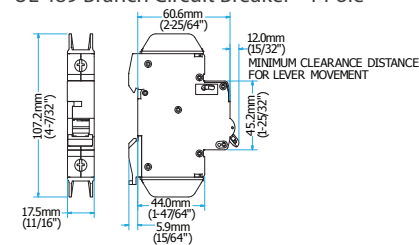
**SPECIFICATIONS**

UL 489 BRANCH CIRCUIT BREAKERS						
	UNITS	1 POLE	1 + N POLE	2 POLE	3 POLE	3 + N POLE
ELECTRICAL GENERAL						
Rated Operating Current	A	0.5 ~ 63				
Operating Frequency	Hz	50/60				
Electrical Life	Ops.	6,000				
Line/Load Wiring		Suitable for reverse feed				
ELECTRICAL UL/CSA APPLICATIONS						
Conformity to Standards		cULus, UL 489, CSA C22.2 No. 5				
AC Rated Operating Voltage	V	277		480Y/277		
DC Rated Operating Voltage	V	60*	—	125* (wired in series)	—	
MAXIMUM SHORT CIRCUIT RATING						
@ 120 VAC	kA	10				
@ 240 VAC	kA	10				
@ 277 VAC	kA	10				
@ 480Y/277 VAC	kA	10				
@ 60 VDC	kA	10	—	10	—	—
@ 125 VDC (wired in series)	kA	—	—	10	—	—
ELECTRICAL IEC APPLICATIONS						
Conformity to Standards		IEC 60947-2, IEC 60898				
ULTIMATE SHORT CIRCUIT BREAKING CAPACITY (Icu)						
@ 240 VAC	kA	10				
@ 415 VAC	kA	10				
RATED SERVICE SHORT CIRCUIT BREAKING CAPACITY (Ics)						
@ 240 VAC	kA	10				
@ 415 VAC	kA	10				
CONSTRUCTION - CONDUCTOR SIZE						
UL/CSA	AWG	1 x #18 ~ #3, 2 x #18 ~ #10				
Solid, Stranded, Fine Stranded	mm²	1 x 0.8 ~ 26.7				
ROHS COMPLIANCE For RoHS compliance documentation by product, refer to <a href="http://www.c3controls.com">www.c3controls.com</a> .						
UL 1077 SUPPLEMENTARY PROTECTORS						
	UNITS	1 POLE	1 + N POLE	2 POLE	3 POLE	3 + N POLE
ELECTRICAL GENERAL						
Rated Operating Current	A	0.5 ~ 63				
Operating Frequency	Hz	50/60				
Electrical Life	Ops.	6,000				
Line/Load Wiring		Suitable for reverse feed				
ELECTRICAL UL/CSA APPLICATIONS						
Conformity to Standards		cURus, UL 1077, CSA C22.2 No. 235				
AC Rated Operating Voltage	V	277		480Y/277		
DC Rated Operating Voltage	V	60*	—	125* (wired in series)	—	
MAXIMUM SHORT CIRCUIT RATING						
@ 120 VAC	kA	10				
@ 240 VAC	kA	10				
@ 277 VAC	kA	10				
@ 480Y/277 VAC	kA	10				
@ 60 VDC	kA	10	—	10	—	—
@ 125 VDC (wired in series)	kA	—	—	10	—	—
ELECTRICAL IEC APPLICATIONS						
Conformity to Standards		IEC 60947-2, IEC 60898				
ULTIMATE SHORT CIRCUIT BREAKING CAPACITY (Icu)						
@ 240 VAC	kA	10				
@ 415 VAC	kA	10				
RATED SERVICE SHORT CIRCUIT BREAKING CAPACITY (Ics)						
@ 240 VAC	kA	10				
@ 415 VAC	kA	10				
CONSTRUCTION - CONDUCTOR SIZE						
UL/CSA	AWG	1 x #18 ~ #3, 2 x #18 ~ #10				
Solid, Stranded, Fine Stranded	mm²	1 x 0.8 ~ 26.7				
ROHS COMPLIANCE For RoHS compliance documentation by product, refer to <a href="http://www.c3controls.com">www.c3controls.com</a> .						

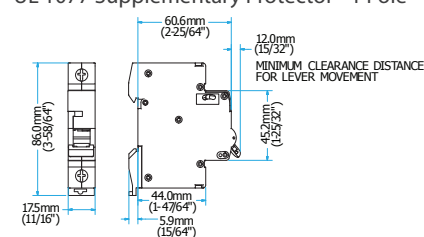
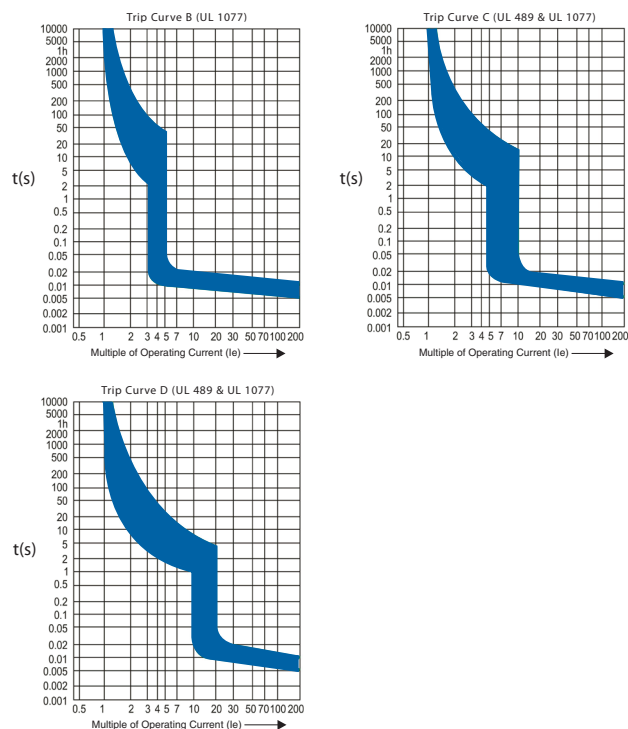
\*NOTE: Available on request, please consult factory.

For complete ratings, detailed specifications, or to download product certifications visit [www.c3controls.com](http://www.c3controls.com).**DIMENSIONS**

UL 489 Branch Circuit Breaker - 1 Pole



UL 1077 Supplementary Protector - 1 Pole

**TRIP CURVES****CERTIFICATIONS****Conformity to Standards:**

UL 489  
UL 1077  
UL 508  
CSA C22.2 No. 5, No. 235  
IEC 60947-2, IEC 60898

**Certifications:**

UL File#: E496118  
UL File#: E496119  
UL File#: E336563  
UL File#: E508090  
CE Marked (per EU Low Voltage Directive 2006/95/EC and RoHS Directive 2011/65/ EU)

